

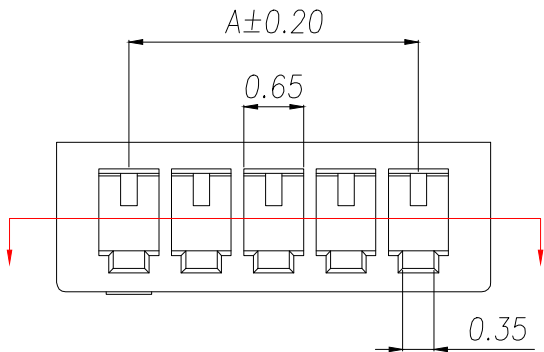
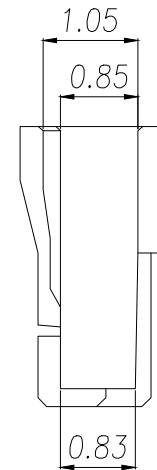
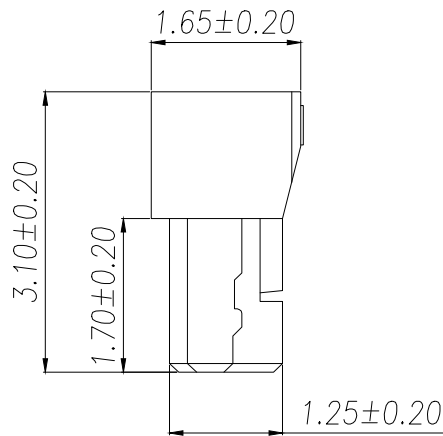


Specifications(规格):
Voltage rating(额定电压):30V AC/DC
Current rating(额定电流):0.5A AC/DC
Withstanding voltage(耐压值):200V AC/minute
Temperature range(工作温度):-25°C~+85°C
Insulation resistance(绝缘电阻):>100MΩ
Contact resistance(接触电阻):<20mΩ
Afer environmental testing(环境测试后):≤30mΩ
Material(材质):PA46

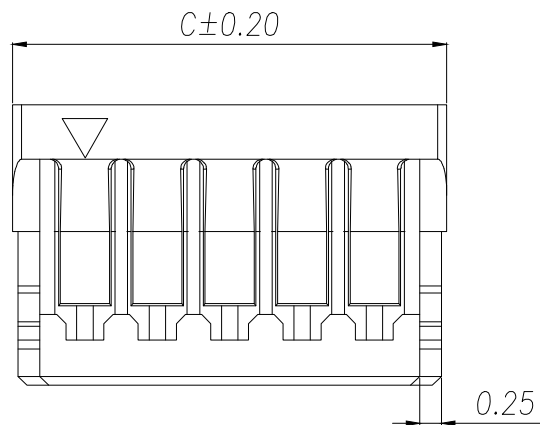

Poles	Dimensionss(mm)		
	A	B	C
0.8-2P	0.80	1.80	2.80
0.8-3P	1.60	2.60	3.20
0.8-4P	2.40	3.40	4.00
0.8-5P	3.20	4.20	4.80
0.8-6P	4.00	5.00	5.60
0.8-7P	4.80	5.80	6.40
0.8-8P	5.60	6.60	7.20
0.8-9P	6.40	7.40	8.00
0.8-10P	7.20	8.20	8.80
0.8-11P	8.00	9.00	9.60
0.8-12P	8.80	9.80	10.40
0.8-13P	9.60	10.60	11.20
0.8-14P	10.40	11.40	12.00
0.8-15P	11.20	12.20	12.80
0.8-16P	12.00	13.00	13.60
0.8-17P	12.80	13.80	14.40
0.8-18P	13.60	14.60	15.20
0.8-19P	14.40	15.40	16.00
0.8-20P	15.20	16.20	16.80

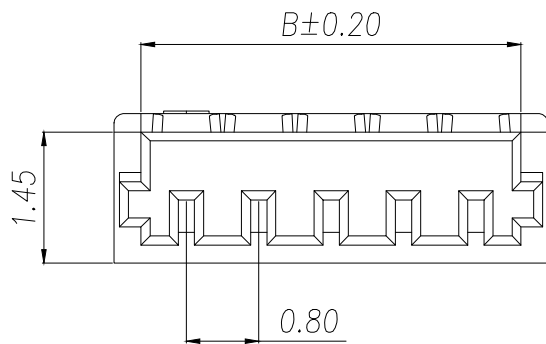

制图 DRAWN	变更内容 DESCRIPTION	日期 DATE	GENERL TOLERANCE		制图 DRAWING	ROSE LEO JOHN		料号 PART NO.	RXSY-0.8-NY		版本 REV.	A
			.X±0.30		审核 CHECK			品名 TITLE	0.80mm Crimp Style connectors		页次 SHEET	1/1
			.XX±0.20		核准 APPROVAL			客户料号 CUTM.NO.				
			.XXX±0.10		单位 UNITS	MM	比例 SCALE	1:1	深圳市睿新晟业科技有限公司			