


压线端子胶壳

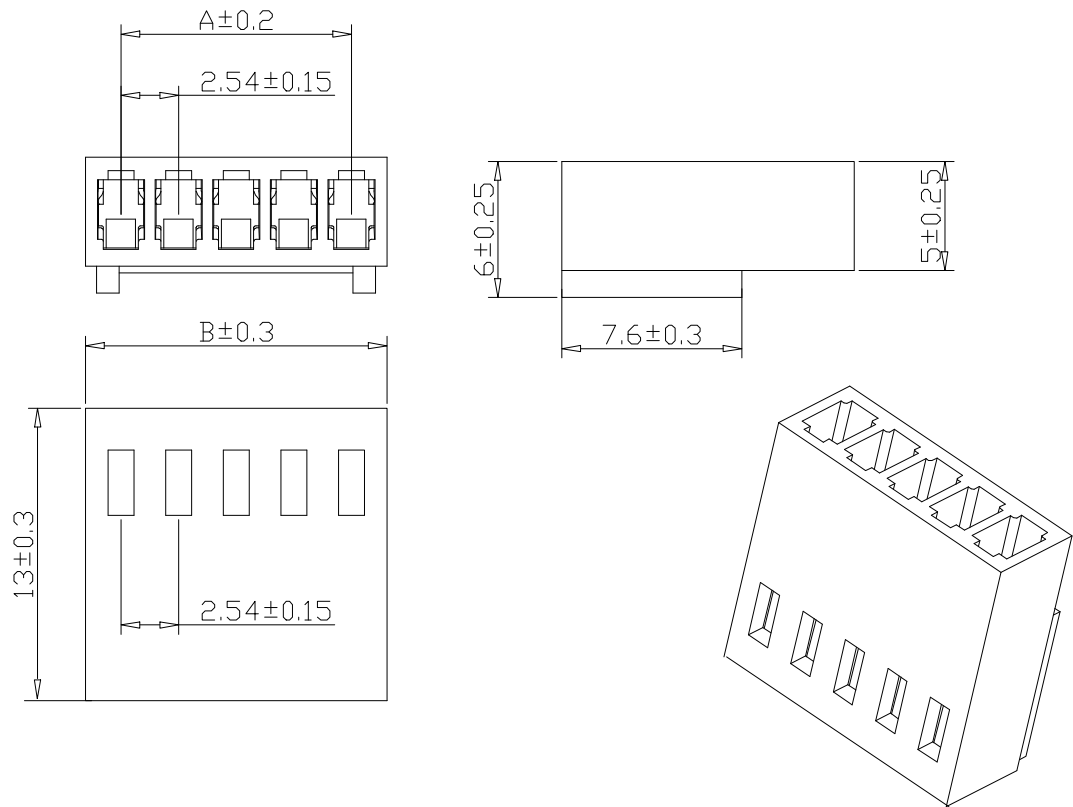

孔位	A	B
2	2.54	5.74
3	5.08	8.28
4	7.62	10.82
5	10.16	13.36
6	12.7	15.90
7	15.24	18.44
8	17.78	20.98
9	20.32	23.52
10	22.86	26.06
11	25.4	28.60
12	27.94	31.14
13	30.48	33.68
14	33.02	36.22
15	35.56	38.76
16	38.10	41.30

使用温度范围 (Ambient temperature Range): $-25^{\circ} \sim +85^{\circ}$

适用线规 (Applicable Wires): AWG 28#~22#

额定电压 (Voltage rating): 250V AC, DC

额定电流 (Current rating): 3A

接触电阻 (Contact Resistance): $< 0.02 \Omega$

绝缘电阻 (Insulation Resistance): $\geq 1000 M\Omega$

耐压 (Withstand Voltage): 1000V/min

材料 (Material)

1. 基座: PA66 FV2

2. 插针: 黄铜

GENERAL TOLERANCE		制图				料号		版次 REV.	A
X.±0.25	X'±2°					品名	RXSY-2510-N*Y	页次 SHEET	1/1
.X±0.20	.X'±1°	审核				客户料号			
.XX±0.15	.XX'±0.5°	核准				深圳市睿新晟业科技有限公司			
.XXX±0.10	.XXX'±0.5°	单位	MM	比例	1:1				