


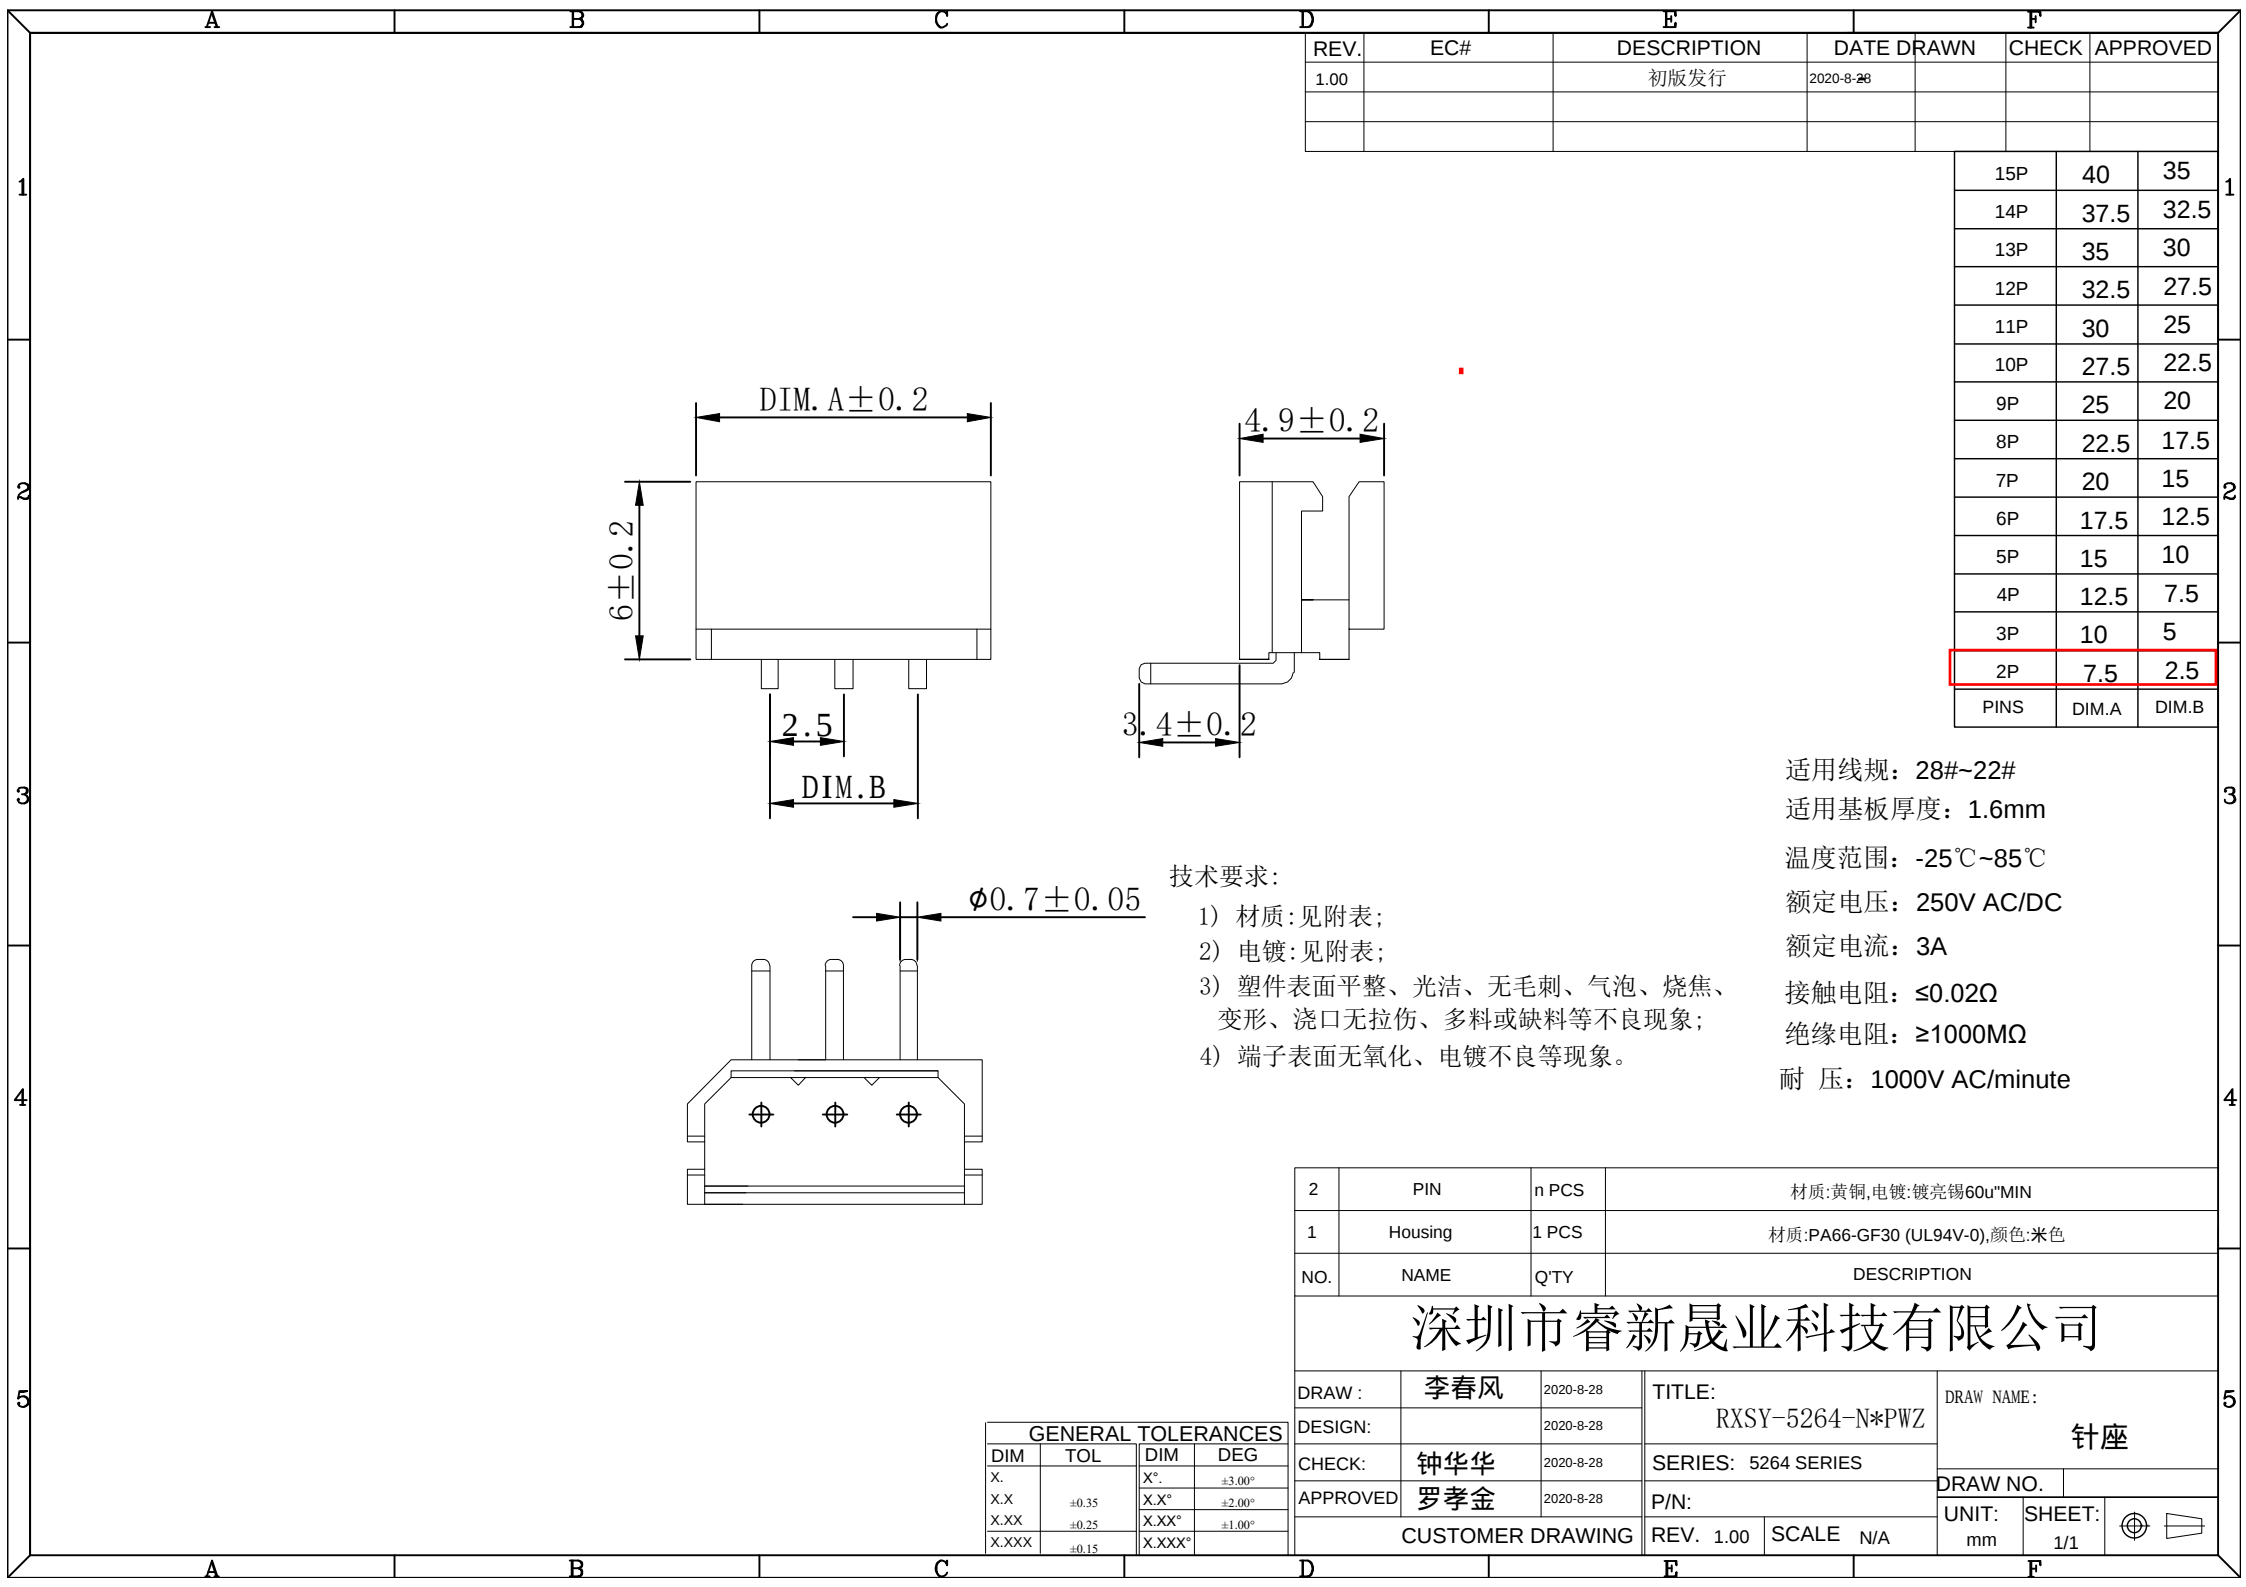

REV.	EC#	DESCRIPTION	DATE DRAWN	CHECK	APPROVED
1.00		初版发行	2020-8-28		

15P	40	35
14P	37.5	32.5
13P	35	30
12P	32.5	27.5
11P	30	25
10P	27.5	22.5
9P	25	20
8P	22.5	17.5
7P	20	15
6P	17.5	12.5
5P	15	10
4P	12.5	7.5
3P	10	5
2P	7.5	2.5
PINS	DIM.A	DIM.B

技术要求:

- 1) 材质:见附表;
- 2) 电镀:见附表;
- 3) 塑件表面平整、光洁、无毛刺、气泡、烧焦、变形、浇口无拉伤、多料或缺料等不良现象;
- 4) 端子表面无氧化、电镀不良等现象。

适用线规: 28#~22#
适用基板厚度: 1.6mm
温度范围: -25℃~85℃
额定电压: 250V AC/DC
额定电流: 3A
接触电阻: ≤0.02Ω
绝缘电阻: ≥1000MΩ
耐 压: 1000V AC/minute

2	PIN	n PCS	材质:黄铜,电镀:镀亮锡60u"MIN		
1	Housing	1 PCS	材质:PA66-GF30 (UL94V-0),颜色:米色		
NO.	NAME	Q'TY	DESCRIPTION		
深圳市睿新晟业科技有限公司					
DRAW :	李春风	2020-8-28	TITLE: RXSY-5264-N*PWZ		DRAW NAME: 针座
DESIGN:		2020-8-28			
CHECK:	钟华华	2020-8-28	SERIES: 5264 SERIES		
APPROVED	罗孝金	2020-8-28	P/N:		DRAW NO.
CUSTOMER DRAWING			REV. 1.00	SCALE N/A	UNIT: mm
					SHEET: 1/1
					

GENERAL TOLERANCES			
DIM	TOL	DIM	DEG
X.		X°.	±3.00°
X.X	±0.35	X.X°	±2.00°
X.XX	±0.25	X.XX°	±1.00°
X.XXX	±0.15	X.XXX°	