
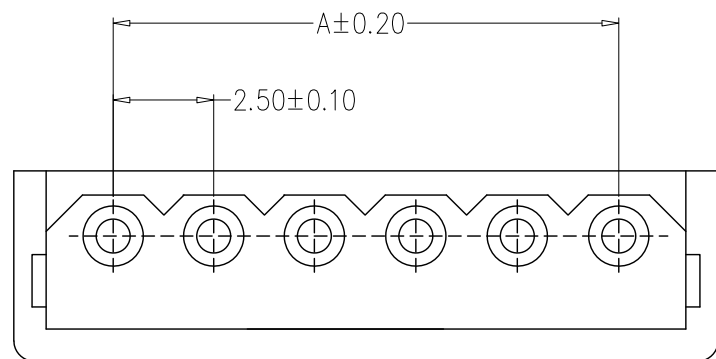
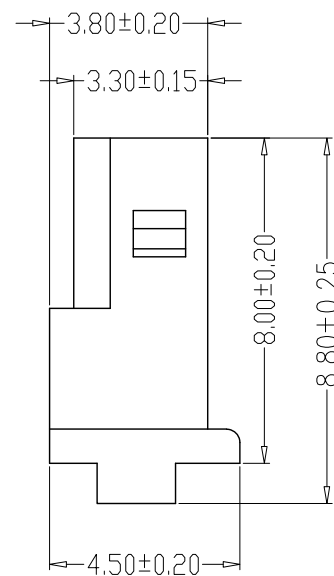


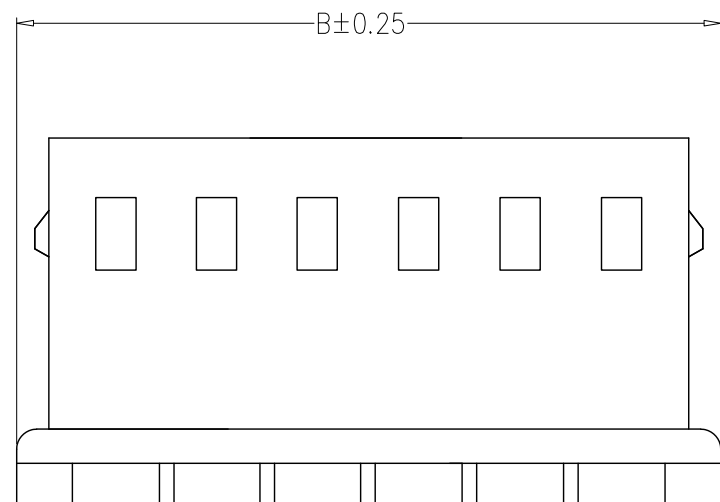

SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1000V AC/minute
- 7、Material:Nylon66, UL94V-0
- 8、Applicable Wires :AWG 26#~22#

编 号	尺寸 (mm)	
	A	B
A2506-02Y	2. 50	7. 40
A2506-03Y	5. 00	9. 90
A2506-04Y	7. 50	12. 40
A2506-05Y	10. 00	14. 90
A2506-06Y	12. 50	17. 40
A2506-07Y	15. 00	19. 90
A2506-08Y	17. 50	22. 40
A2506-09Y	20. 00	24. 90
A2506-10Y	22. 50	27. 40
A2506-11Y	25. 00	29. 90
A2506-12Y	27. 50	32. 40
A2506-20Y	47. 50	52. 40

制图 DRAWN	变更内容 DESCRIPTION	日期 DATE	GENERL TOLERANCE		制 图 DRAWING				料 号 PART NO.	RXSY-5264-N*Y	版 本 REV.	A
			X.±0.25	X.*±2°	审 核 CHECK		品 名 TITLE	5264孔座	页 次 SHEET	1/1		
			.X±0.20	.X*±1°	核 准 APPROVAL		客户料号 CUTM. NO.					
			.XX±0.15	.XX*±0.5°	深圳市睿新晟业科技有限公司							
			.XXX±0.10	.XXX*±0.5°							单 位 UNITS	MM