


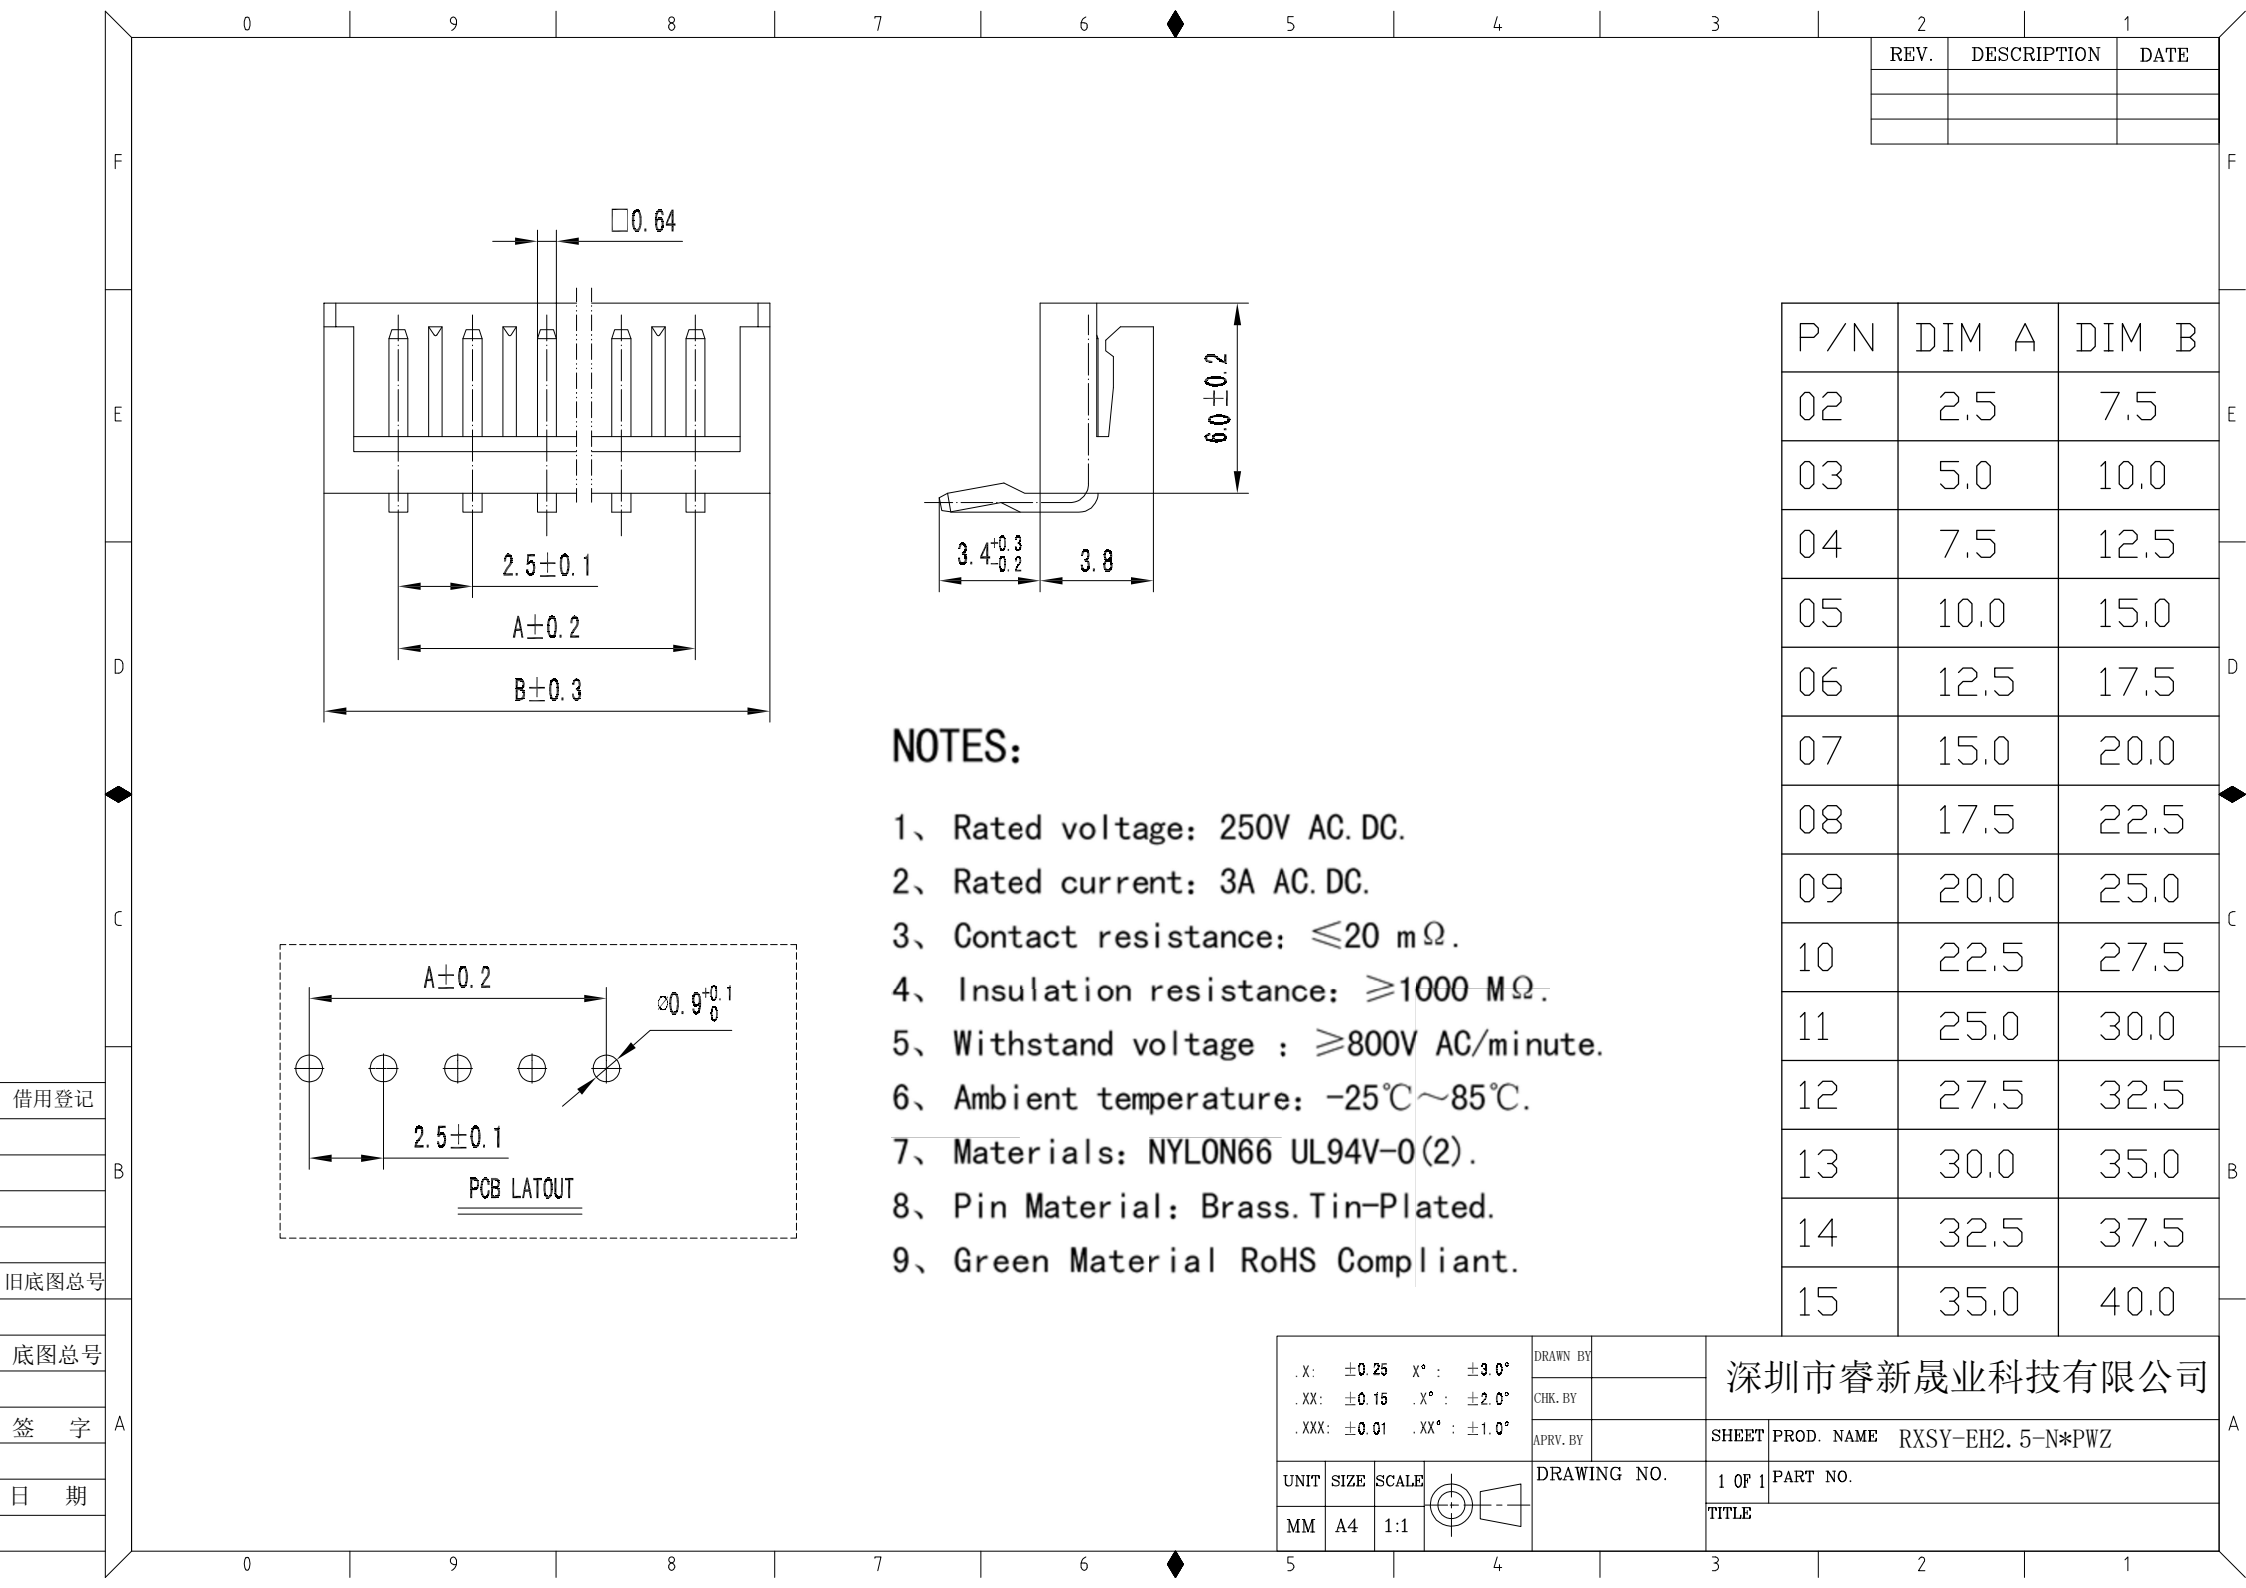

REV.	DESCRIPTION	DATE

P/N	DIM A	DIM B
02	2.5	7.5
03	5.0	10.0
04	7.5	12.5
05	10.0	15.0
06	12.5	17.5
07	15.0	20.0
08	17.5	22.5
09	20.0	25.0
10	22.5	27.5
11	25.0	30.0
12	27.5	32.5
13	30.0	35.0
14	32.5	37.5
15	35.0	40.0

NOTES:

- 1、Rated voltage: 250V AC.DC.
- 2、Rated current: 3A AC.DC.
- 3、Contact resistance: $\leq 20\text{ m}\Omega$.
- 4、Insulation resistance: $\geq 1000\text{ M}\Omega$.
- 5、Withstand voltage : $\geq 800\text{V AC/minute}$.
- 6、Ambient temperature: $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$.
- 7、Materials: NYLON66 UL94V-0(2).
- 8、Pin Material: Brass.Tin-Plated.
- 9、Green Material RoHS Compliant.

.X: ±0.25 X°: ±3.0° .XX: ±0.15 .X°: ±2.0° .XXX: ±0.01 .XX°: ±1.0°			DRAWN BY		深圳市睿新晟业科技有限公司	
			CHK. BY			
			APRV. BY			
				SHEET	PROD. NAME RXSY-EH2.5-N*PWZ	
UNIT	SIZE	SCALE		DRAWING NO.		
				1 OF 1		
MM	A4	1:1		PART NO.		
				TITLE		