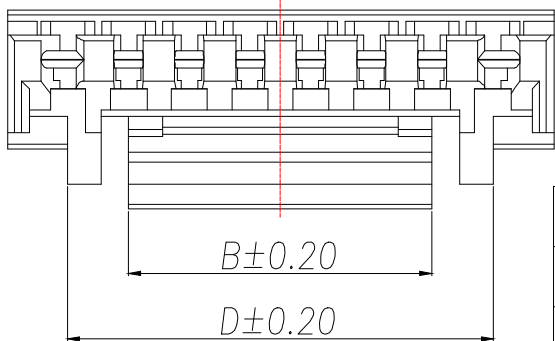
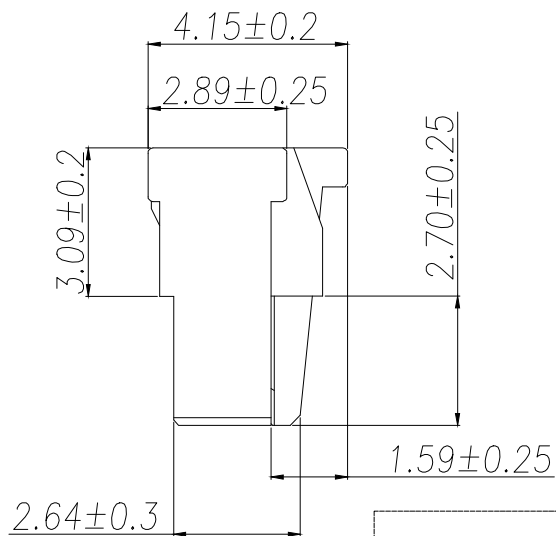
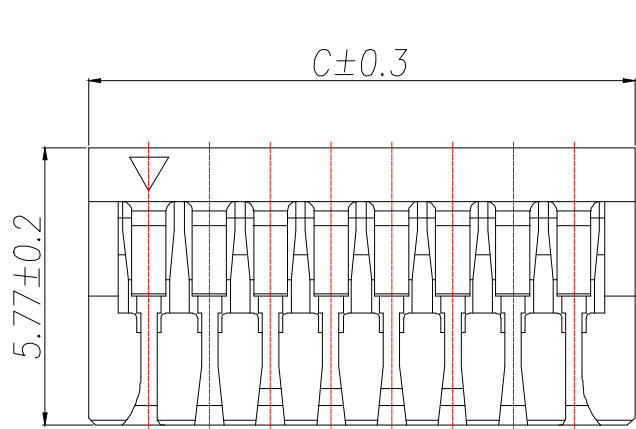
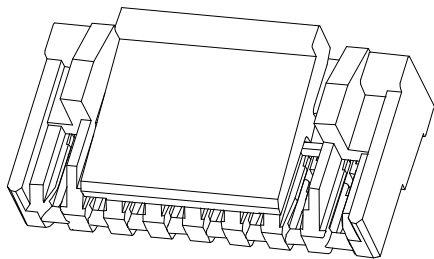
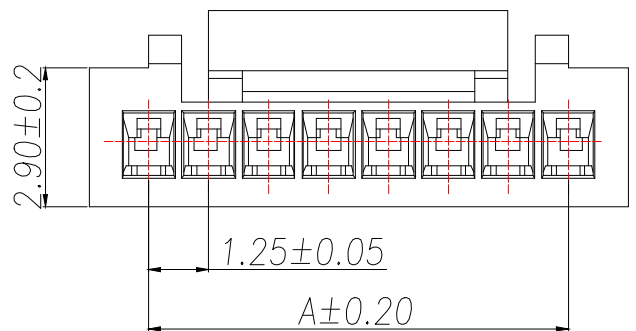


技术要求Specification:

1. 材质Material: PA66 UL94V-0:
2. 额定电流 Current rating:1.0A AC,DC
3. 额定电压 Voltage rating: 50V AC,DC
4. 温度范围 Temperature range:-25℃to+85℃
5. 接触电阻 Contact resistance:<30mΩ
6. 绝缘电阻Insulation resistance:>100MΩ
7. 耐压Withstand voltage:500V AC/minute
8. 塑件表面平整光洁, 无明显的毛刺、气泡、变形、浇口拉伤、缺料等不良现象。
Plastic surface smooth and clean,
no obvious burrsbubbles, distortion, gate strain,
lack of material and otherundesirable phenomena.

Part No	Pin	A	B	C	D
GH1.25-2P	2	1.25	2.00	3.75	
GH1.25-3P	3	2.50	3.20	5.00	
GH1.25-4P	4	3.75	4.30	6.25	
GH1.25-5P	5	5.00	4.30	7.50	6.25
GH1.25-6P	6	6.25	6.25	8.75	8.75
GH1.25-7P	7	7.50	6.25	10.00	8.75
GH1.25-8P	8	8.75	6.25	11.25	8.75
GH1.25-9P	9	10.00	6.25	12.50	8.75
GH1.25-10P	10	11.25	8.30	13.75	10.70
GH1.25-11P	11	12.50	8.30	15.00	10.70
GH1.25-12P	12	13.75	8.30	16.25	10.70
GH1.25-13P	13	15.00	8.30	17.50	10.70
GH1.25-14P	14	16.25	8.30	18.75	10.70
GH1.25-15P	15	17.50	8.30	20.00	10.70
GH1.25-16P	16	18.75	8.30	21.25	

制图 DRAWN	变更内容 DESCRIPTION	日期 DATE	GENERAL TOLERANCE		制图 DRAWING	ROSE			料号 PART NO.	RXSY-GH1.25-NY		版本 REV.	A
			.X±0.30	X.*±1°	审核 CHECK	LEO			品名 TITLE	GH1.25MM		页次 SHEET	1/1
			.XX±0.20		核准 APPROVAL	JOHN			客户料号 CUTM.NO.				
			.XXX±0.10		单位 UNITS	MM	比例 SCALE	1:1	深圳市睿新晟业科技有限公司				
1	4	5	6	6	7	7	7	7	8	8	9	9	