

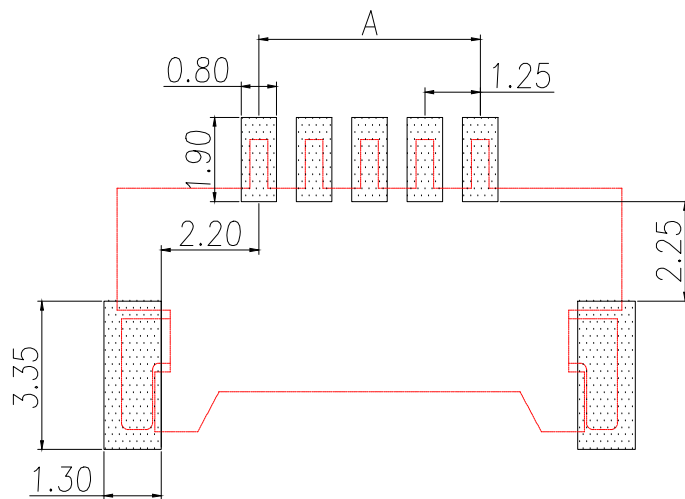
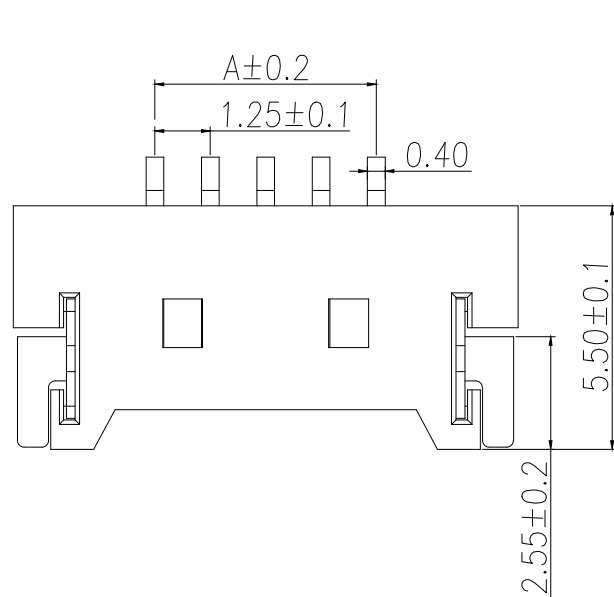


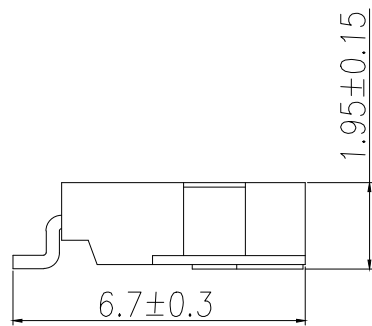


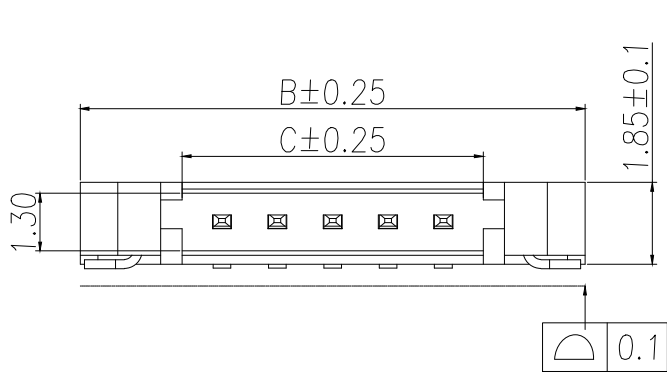

PCB LAYOUT

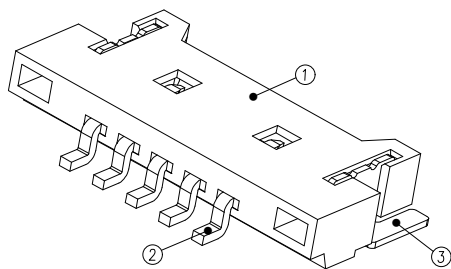

NOTES:

- 1.BASE: PA6T
- 2.PIN: Brass
- 3.Solder Tab: Brass

SPECIFICATIONS:

- 1.Spacing: 1.25
- 2.Voltage Rating: 125V AC DC
- 3.Current Rating: 1A AC DC
- 4.Insulation Resistance: 100MΩ Min
- 5.Contact Resistance: 20mΩ Max
- 6.Withstanding voltage: 500V AC 1/Minute
- 7.Temperatuer Range: -25℃ ~+ 85℃

Part No	PIN	A	B	C
MX1.25-2PCB	2	1.25	7.65	3.05
MX1.25-3PCB	3	2.50	8.90	4.30
MX1.25-4PCB	4	3.75	10.15	5.55
MX1.25-5PCB	5	5.00	11.40	6.80
MX1.25-6PCB	6	6.25	12.65	8.05
MX1.25-7PCB	7	7.50	13.90	9.30
MX1.25-8PCB	8	8.75	15.15	10.55
MX1.25-9PCB	9	10.00	16.40	11.80
MX1.25-10PCB	10	11.25	17.65	13.05
MX1.25-11PCB	11	12.50	18.90	14.30
MX1.25-12PCB	12	13.75	20.15	15.55
MX1.25-13PCB	13	15.00	21.40	16.80
MX1.25-14PCB	14	16.25	22.65	18.05
MX1.25-15PCB	15	17.50	23.90	19.30
MX1.25-16PCB	16	18.75	25.15	20.55

制图 DRAWN	变更内容 DESCRIPTION	日期 DATE	GENERAL TOLERANCE		制图 DRAWING	EMMA			料号 PART NO.	RXSY-MX1.25-NPCB	版本 REV.	A
			X.±0.20	X'.:±5°	审核 CHECK	EVA			品名 TITLE	WAFER 1.25 超薄	页次 SHEET	1/1
			.X±0.10	X.X':±3°	核准 APPROVAL	JADE			客户料号 CUTM.NO.			
			.XX±0.05	X.XX':±1°	单位 UNITS	MM	比例 SCALE	1:1	深圳市睿新晟业科技有限公司			