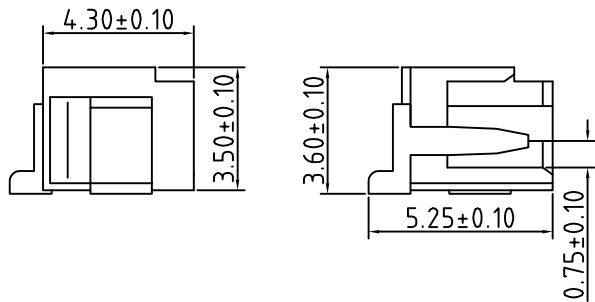
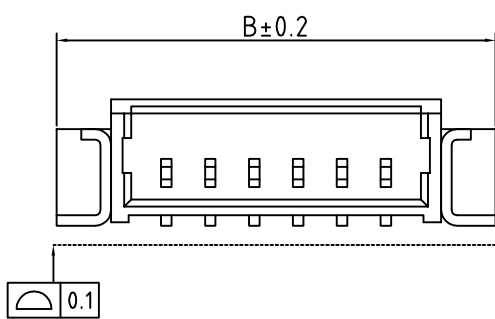
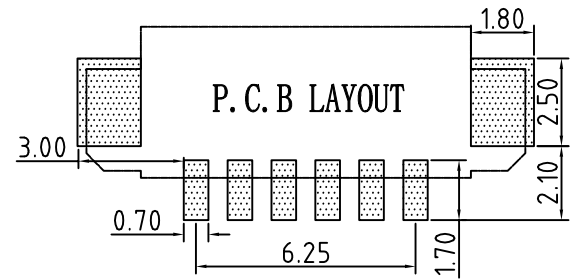
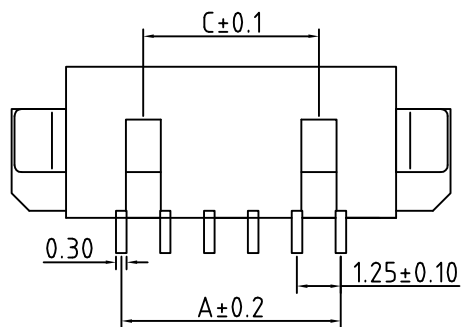


Pin	A	B	C
2	1.25	7.50	
3	2.50	8.75	
4	3.75	10.00	2.50
5	5.00	11.25	3.75
6	6.25	12.50	5.00
7	7.50	13.75	6.25
8	8.75	15.00	7.50
9	10.00	16.25	8.75
10	11.25	17.50	10.00
11	12.50	18.75	11.25
12	13.75	20.00	12.50
13	15.00	21.25	13.75
14	16.25	22.50	15.00
15	17.50	23.75	16.25
16	18.75	25.00	17.50

技术参数
间距: 1.25
温度范围: -25~+85℃
额定电压: 125V AC, DC
额定电流: 1.0A AC, DC
接触电阻: 20mΩ
绝缘电阻: 100MΩ
耐压: 500V AC/minute

线性公差 / General Tolerance X ±0.2 X.X ±0.1 X.XX ±0.05 角度公差 / Angle Tolerance X° ±5.0° X.X° ±3.0° X.XX° ±1.0°					材料 / Material					深圳市睿新晟业科技有限公司		
						①塑座: LCP 本色					品名 / ProduceName MX1.25 卧贴	
						②接 触 针: 黄铜 (镀锡)						
						③焊片: 黄铜 (镀锡)						
	标记	变 更 内 容			签名	年月日						
绘图						阶段标记		版本	比例			
视角 / Projection 	审核								2.0	1:1	型号 / Model RXSY-MX1.25-NPWT	
	工艺			批准			共 1 张		第 1 张			