
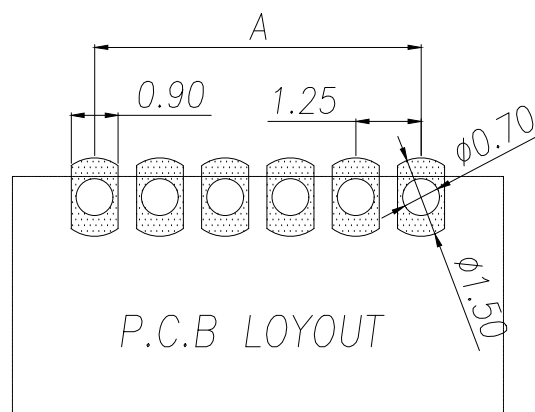
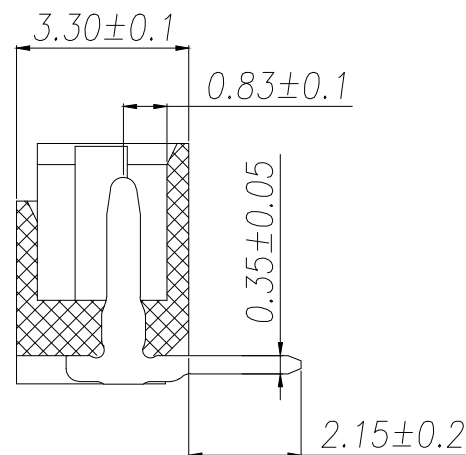


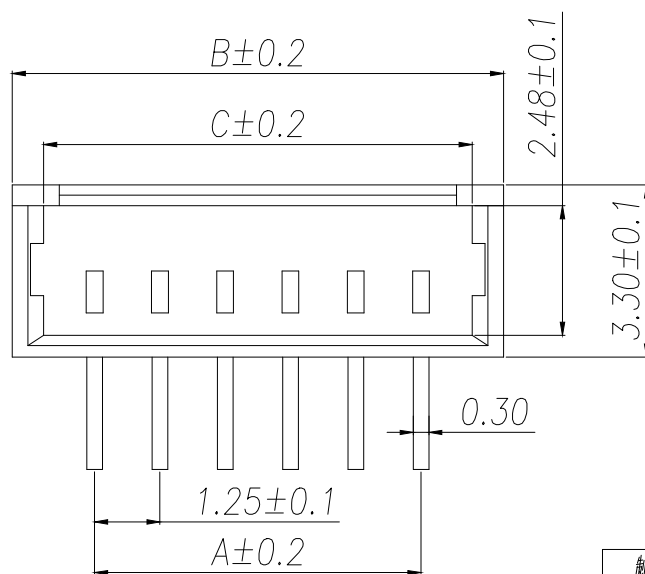

- 1.BASE: LCP
- 2.PIN: Brass
- 3.Solder Tab: Brass

- 1.Spacing: 1.25
- 2.Voltage Rating: 125V AC DC
- 3.Current Rating: 1A AC DC
- 4.Insulation Resistance: 100MΩ Min
- 5.Contact Resistance: 20mΩ Max
- 6.Withstanding voltage: 500V AC 1/Minute
- 7.Temperatuer Range: -25℃ ~+ 85℃

Part No	Pin	A	B	C	D
MX1.25-2P	2	1.25	4.40	3.20	/
MX1.25-3P	3	2.50	5.65	4.45	/
MX1.25-4P	4	3.75	6.90	5.70	2.50
MX1.25-5P	5	5.00	8.15	6.95	3.75
MX1.25-6P	6	6.25	9.40	8.20	5.00
MX1.25-7P	7	7.50	10.65	9.45	6.25
MX1.25-8P	8	8.75	11.90	10.70	7.50
MX1.25-9P	9	10.00	13.15	11.95	8.75
MX1.25-10P	10	11.25	14.40	13.20	10.00
MX1.25-11P	11	12.50	15.65	14.45	11.25
MX1.25-12P	12	13.75	16.90	15.70	12.50
MX1.25-13P	13	15.00	18.15	16.95	13.75
MX1.25-14P	14	16.25	19.40	18.20	15.00
MX1.25-15P	15	17.50	20.65	19.45	16.25
MX1.25-16P	16	18.75	21.90	20.70	17.50

制图 DRAWN	变更内容 DESCRIPTION	日期 DATE	GENERAL TOLERANCE		制图 DRAWING	ROSE			料号 PART NO.	RXXSY-MX1.25-NPWZ		版本 REV.	A
			.X±0.20	X°.±5°	审核 CHECK	LEO			品名 TITLE	WAFER 1.25 弯针		页次 SHEET	1/1
			.XX±0.10	X.X°.±3°	核准 APPROVAL	JOHN			客户料号 CUTM.NO.				
			.XXX±0.05	X.XX°.±1°					深圳市睿新晟业科技有限公司				
					单位 UNITS	MM	比例 SCALE	1:1					