
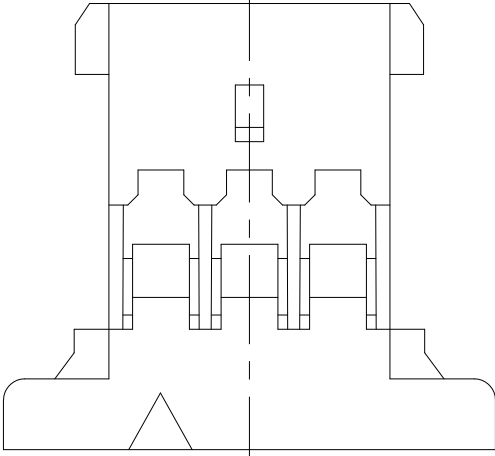
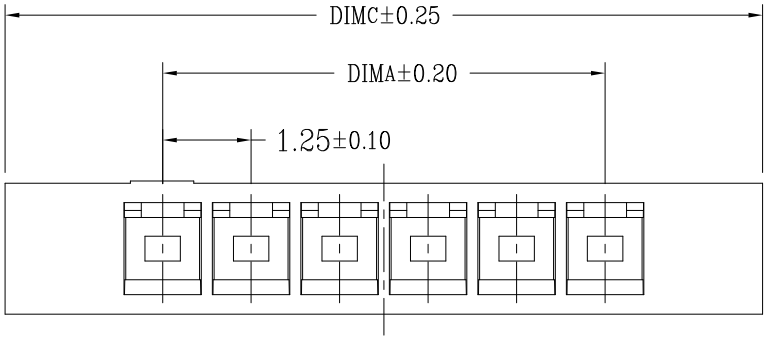
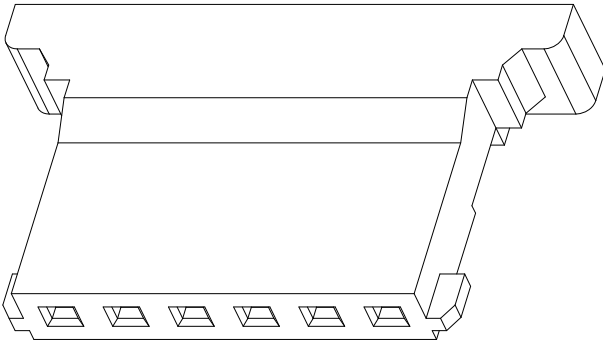
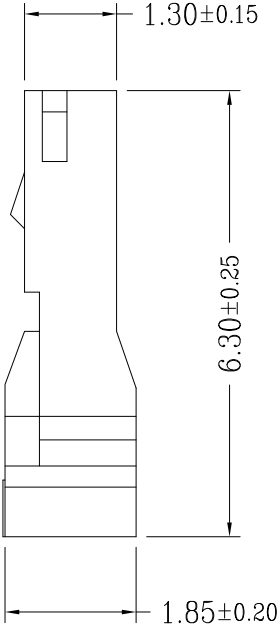


E		F	
版次	变更摘要	日期	
0	新产品发行	2021/7/10	

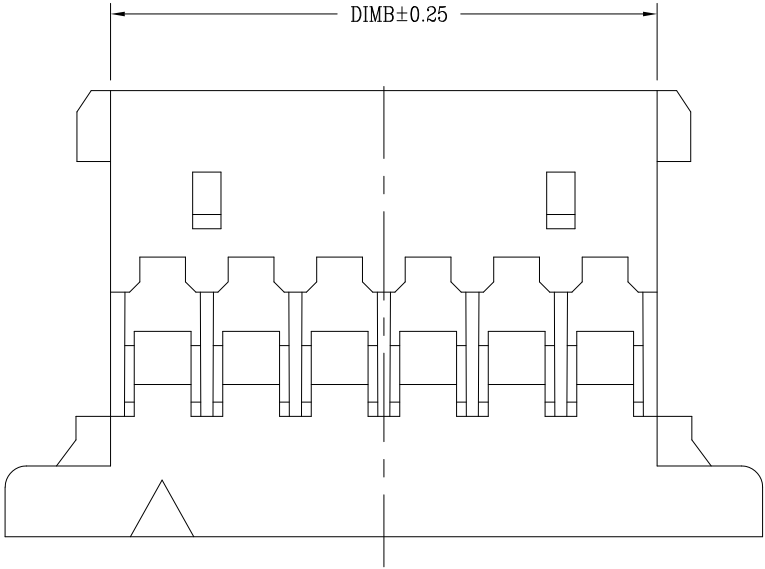

2~3 Pin结构外形(锁扣)

CKT	A	B	C
2	1.25	2.72	5.70
3	2.50	3.97	6.95
4	3.75	5.22	8.20
5	5.00	6.47	9.45
6	6.25	7.72	10.70
7	7.50	8.97	11.95
8	8.75	10.22	13.20
9	10.00	11.47	14.45
10	11.25	12.72	15.70
11	12.50	13.97	16.95
12	13.75	15.22	18.20
13	15.00	16.47	19.45
14	16.25	17.72	20.70
15	17.50	18.97	21.95
16	18.75	20.22	23.20
18	21.25	22.72	25.70
20	23.75	25.22	28.20

- 技术指标:
1. 温度范围: -25° C~+85° C.
 2. 额定电压: 125V AC, DC.
 3. 耐电压: 250V AC/minute.
 4. 接触电阻: ≤20mΩ .
 5. 绝缘电阻: ≥100MΩ.
 6. 额定电流: 1A AC, DC.
 7. 材质/阻燃等级: PA66/UL94V-0



一般公差 (TOLERANCE)			
X. ±.50	.XX ±.10		
.X ±.20	.XXX ±.05		
ANGLES	±1°		

深圳市睿新晟业科技有限公司			
品名 (TITLE)		制图 (DR)	
压线端子胶壳		校对 (CHKD)	
料号 (DWG.NO)		审核 (APPD)	
RXSY-MX1.25-N*YCB			
比例 (SCALE)	1:1	单位 (UNITS)	mm
张数 (SHEET)	1 OF 1	SIZE	A4
REV	A		