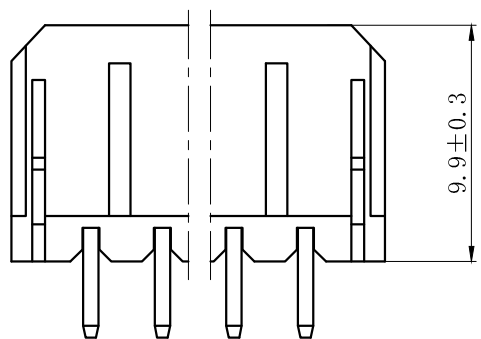


PCB LAYOUT

NOTES:

- 1、Rated voltage : 250V AC.DC
- 2、Rated current : 3.5A AC.DC
- 3、Contact resistance : $\leq 20m\Omega$
- 4、Insulation resistance : $\geq 1000M\Omega$
- 5、Withstand voltage : 1000V AC/minute
- 6、Ambient temperature : $-25^{\circ}C\sim 85^{\circ}C$
- 7、Materials : Nylon UL94V-0
- 8、Green Material RoHS Compliant

Circuits	Dimension mm	
	A	B
2	3.0	9.6
3	6.0	12.6
4	9.0	15.6
5	12.0	18.6
6	15.0	21.6
7	18.0	24.6
8	21.0	27.6
9	24.0	30.6
10	27.0	33.6
11	30.0	36.6
12	33.0	39.6

GENERAL TOLERANCES (UNLESS SPECIFIED)		深圳市睿新晟业科技有限公司			
.X: ± 0.25	X° : ± 3.0°	PRODUCT NAME:		TITLE: 3.0 mm Pitch	
.XX: ± 0.15	.X° : ± 2.0°	MX(3.0) single-row straight pins		Wire To Board Wafer	
.XXX: ± 0.01	.XX° : ± 1.0°	DR:DL	DATE:26/01/26	PART NO:	
FINISH:		CHKD:ZFC	DATE:26/01/26	RXSY-MX3.0-N*PZZ	
		APPD:LPJ	DATE:26/01/26	SCALE: N/A	PAGE: 1/1
				UNITS: mm	REV. : A