

1 2 3 4 5 6 7 8

A

B

C

D

E



F

3PIN~12PIN




2PIN

NOTES:

- 1、Rated voltage : 250V AC.DC
2、Rated current : 3.5A AC.DC
3、Contact resistance : $\leq 20\text{m}\Omega$
4、Insulation resistance : $\geq 1000\text{M}\Omega$
5、Withstand voltage : 1000V AC/minute
6、Ambient temperature : $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$
7、Materials : Nylon UL94V-0
8、Green Material RoHS Compliant

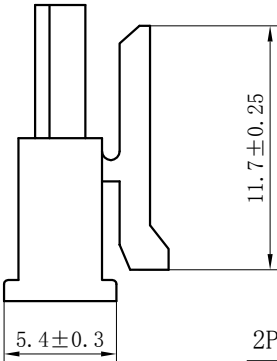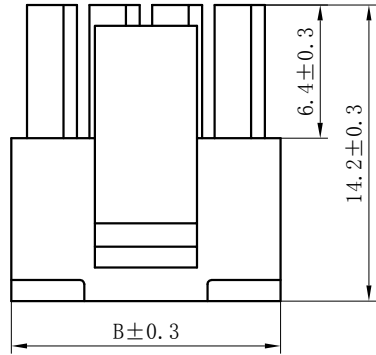

2PIN结构

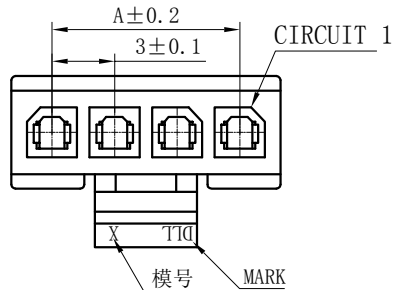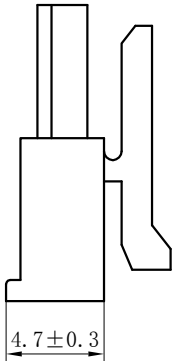

Circuits	Type	Dimension mm		Circuits	Type	Dimension mm	
		A	B			A	B
2	2Y	3.0	6.9	8	8Y	21.0	24.9
3	3Y	6.0	9.9	9	9Y	24.0	27.9
4	4Y	9.0	12.9	10	10Y	27.0	30.9
5	5Y	12.0	15.9	11	11Y	30.0	33.9
6	6Y	15.0	18.9	12	12Y	33.0	36.9
7	7Y	18.0	21.9				

GENERAL TOLERANCES (UNLESS SPECIFIED)		深圳市睿新晟业科技有限公司			
.X: ± 0.25	X° : ± 3.0°	PRODUCT NAME: MX(3.0) single-row hole seat		TITLE: 3.0mm Pitch Housing	
.XX: ± 0.15	.X° : ± 2.0°	DR: DL		DATE:26/01/26	
.XXX: ± 0.01	.XX° : ± 1.0°	DATE:26/01/26		PART NO: RXSY-MX3.0-N*Y	
FINISH: _____		CHKD:ZFC		DATE:26/01/26	
		APPD:LPJ		DATE:26/01/26	
		SCALE: N/A		PAGE: 1/1	
		UNITS: mm		REV.: A	

1 2 3 4 5 6 7 8

A

B

C

D

E

F