


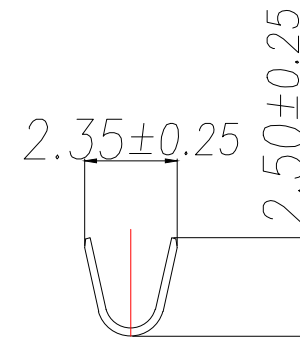
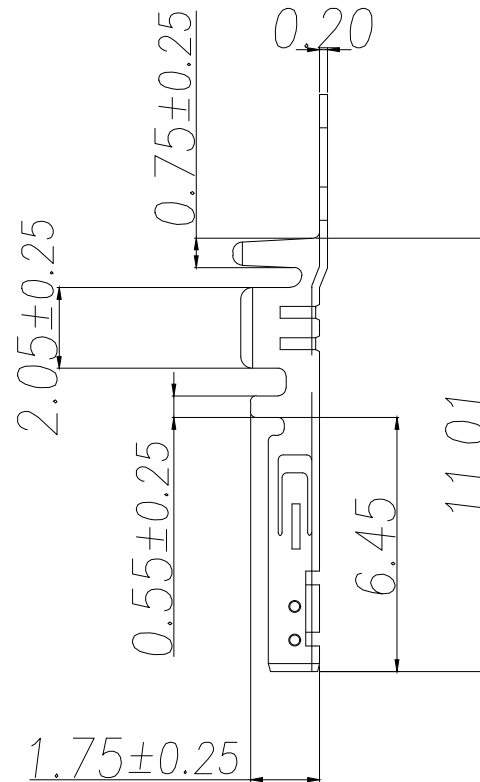


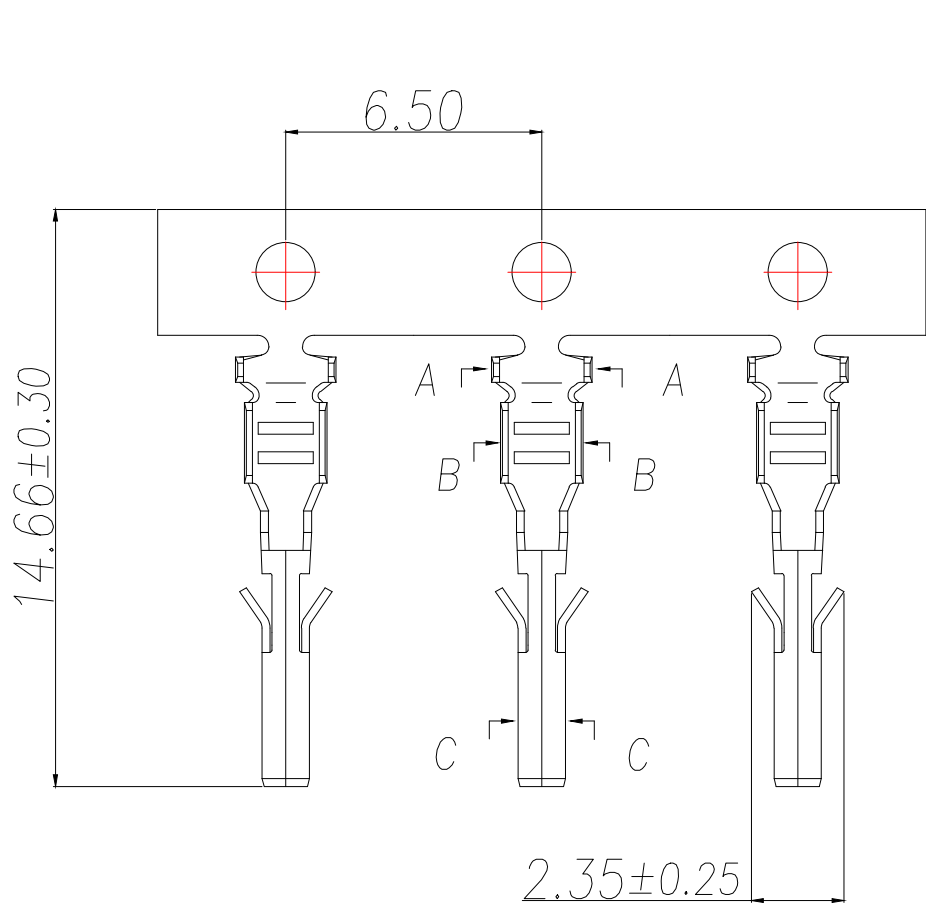

SEC:A-A

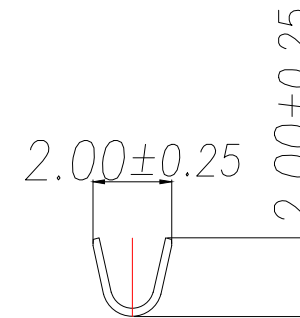

SEC:B-B

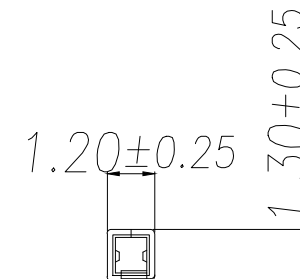

SEC:C-C

Technical Index:

1. Temperature range: $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$.
2. Rated voltage: 250V DC/AC(rms).
3. Rated current: 5A AC, DC.
4. Contact resistance: $\leq 20\text{m}\Omega$.
5. Dielectric withstanding voltage): 1500V AC/minute.
6. Insulation resistance: $\geq 1000\text{M}\Omega$.
7. Apply to gauge): AWG#20~#24.

序号	品名	材质
1	端子	Phosphor Bronze Bright tin plated

制图 DRAWN	变更内容 DESCRIPTION	日期 DATE	GENERAL TOLERANCE		制图 DRAWING	ROSE			料号 PART NO.	RXSY-MX3.0-T	版本 REV.	A
			.X±0.30	X.*±5°	审核 CHECK	LEO			品名 TITLE	MX3.0MM TERMINAL	页次 SHEET	1/1
			.XX±0.25	X.X*±1°	核准 APPROVAL	JOHN			客户料号 CUTM.NO.			
			.XXX±0.15		单位 UNITS	MM	比例 SCALE	1:1	深圳市睿新晟业科技有限公司			