

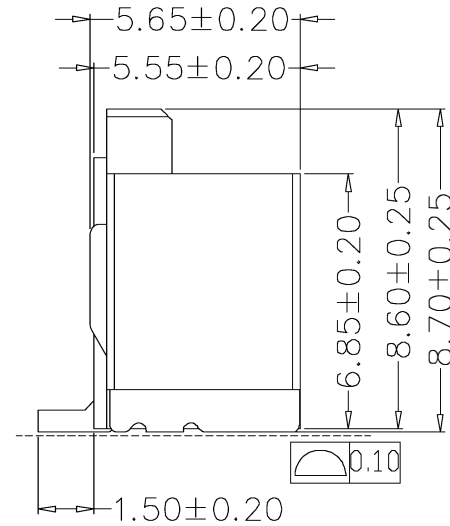
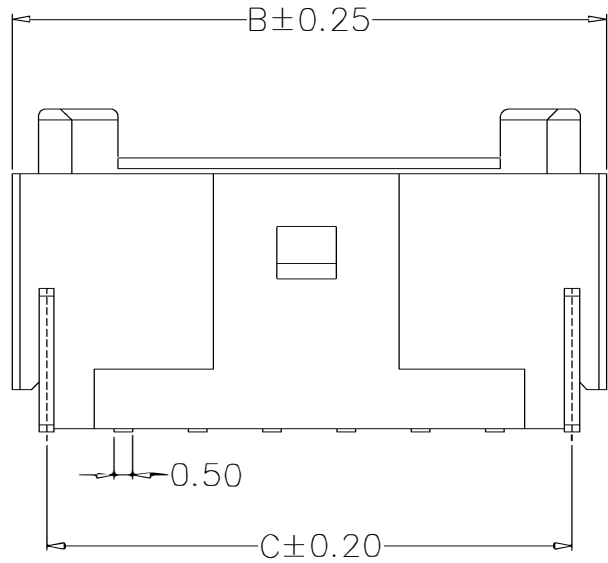


版本 REV.	日期 DATE	ECN NO.	变更内容 DESCRIPTION	制图 DRAWN

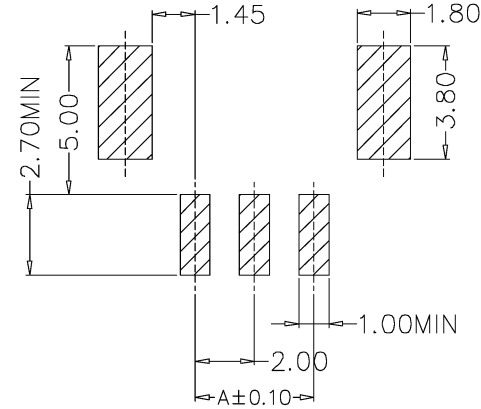

SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 300V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 800V AC/minute
- 7、Material: Wafer Nylon6T, UL94V-0
PIN Brass Tin-plated
Solder tab Brass Tin-plated

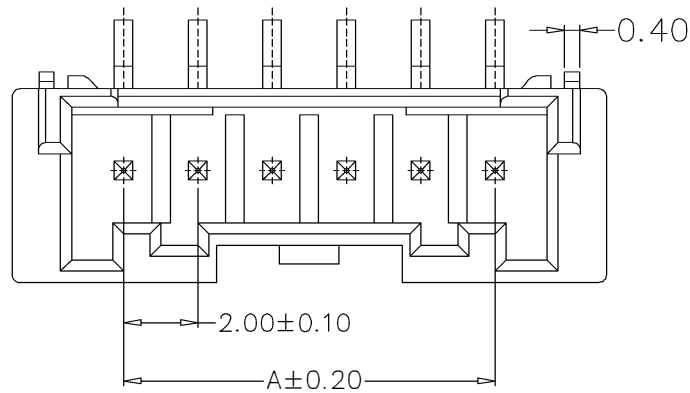

PCB LAYOUT

编 号	尺寸 (mm)	
	A	B
PAE-2ALT	2.00	8.00
PAE-3ALT	4.00	10.00
PAE-4ALT	6.00	12.00
PAE-5ALT	8.00	14.00
PAE-6ALT	10.00	16.00
PAE-7ALT	12.00	18.00
PAE-8ALT	14.00	20.00
PAE-9ALT	16.00	22.00
PAE-10ALT	18.00	24.00
PAE-11ALT	20.00	26.00
PAE-12ALT	22.00	28.00
	28.00	34.00

GENERAL TOLERANCE		制 图 DRAWING	钱岳生 2014、07、01		料 号 PART NO	RXSY-PAE2.0-N*PLT		版 本	A
X.±0.25	X.*±2°		审 核 CHECK	张 名 2014、07、03		品 名 TITLE			1/1
.X±0.20	.X*±1°	核 准 APPROVAL		张 名 2014、07、05		客 户 料 号 CUTM NO			
.XX±0.15	.XX*±0.5°		单 位 UNITS	MM	比 例 SCALE	1:1	深圳市睿新晟业科技有限公司		
.XXX±0.10	.XXX*±0.5°								