







变更单号	版本	日期	内 容 描 述	变更者
1		21/08/18	新产品发行	

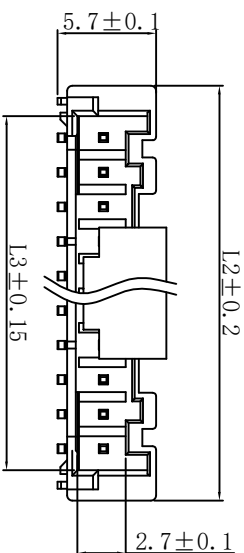




2pin 样式




3pin 样式



4pin 样式

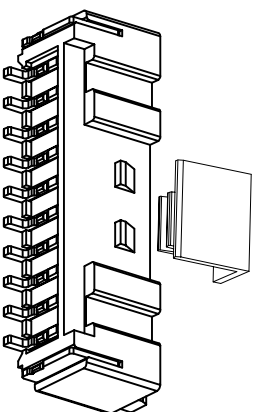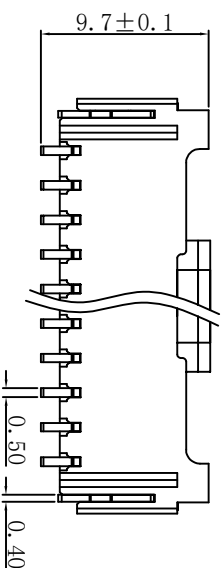

5-6pin 样式

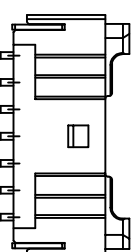

7-8-9pin 样式


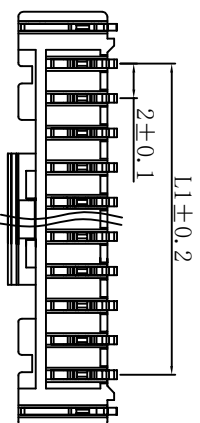


示意图 10pin 样式

11. 12. 13. 14. 15. pin 样式同上

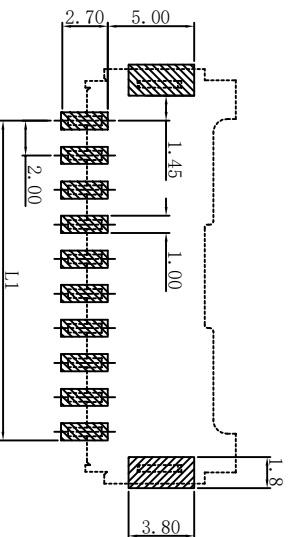

- 技术参数:
1. 额定电流: 3A AC/DC.
 2. 额定电压: 250V AC/DC.
 3. 工作温度: -20℃ to 85℃.
 4. 接触电阻: 20mΩ Max.
 5. 绝缘电阻: 1000MΩ Min.
 6. 耐电压: 800V AC/minute.
 7. 符合ROSH要求.
- 材料
1. 基座: PA6T.
 2. 插针: 黄铜 焊片: 黄铜
 3. 电镀: 镍 和 锡.

15pin	28.0	34.0	30.55
14pin	26.0	32.0	28.55
13pin	24.0	30.0	26.55
12pin	22.0	28.0	24.55
11pin	20.0	26.0	22.55
10pin	18.0	24.0	20.55
9pin	16.0	22.0	18.55
8pin	14.0	20.0	16.55
7pin	12.0	18.0	14.55
6pin	10.0	16.0	12.55
5pin	8.0	14.0	10.55
4pin	6.0	12.0	8.55
3pin	4.0	10.0	6.55
2pin	2.0	8.0	4.55
pin	L1	L2	L3

深圳市睿新晟业科技有限公司

RXSY-PAE2. 0-NPWT										
X. ±0.50		设计		日期	2021. 08. 18		名称			
X.X ±0.25		审核		日期	2021. 08. 18					
X.XX ±0.20		批准		日期	2021. 08. 18		料号			
X° ±3°				日期						
未注公差	比例	1:1	单位	m m	版本	A	页码	1 0F 1	A4	