

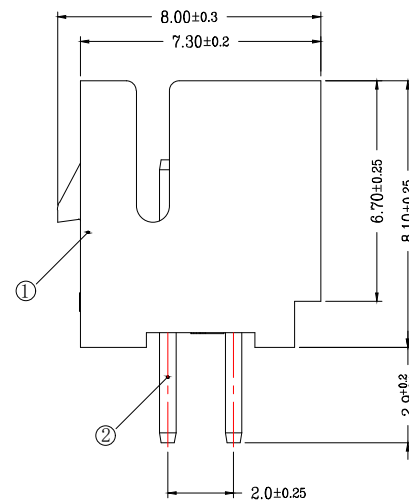
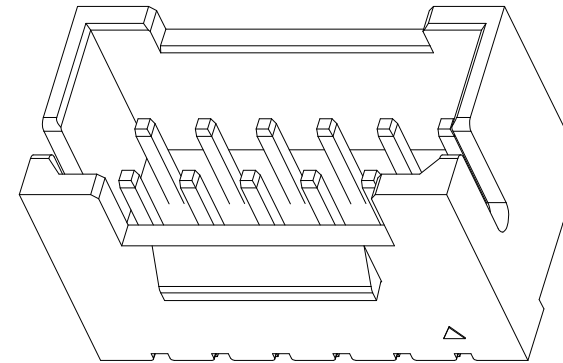



F		
序号	品名	材质
①	2.0A型双排立式WTB胶芯	PA46 UL94V-0 白色
②	2.0F型卧式2代WTB端子	铜合金/表面镀锡



1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 工作温度：-25° C~85° C。
3. 额定电压：250V DC/AC(rms)。
4. 额定电流：3.0A AC, DC。
5. 接触电阻：≤20mΩ。
6. 耐压值：800V AC/minute。
7. 绝缘电阻：≥1000MΩ。

CKT	DIM A	DIM B	DIM C
2*2	2.0	6.0	3.2
2*3	4.0	8.0	3.2
2*4	6.0	10.0	3.0
2*5	8.0	12.0	5.0
2*6	10.0	14.0	7.0
2*7	12.0	16.0	9.0
2*8	14.0	18.0	11.0
2*9	16.0	20.0	13.0
2*10	18.0	22.0	15.0
2*11	20.0	24.0	17.0
2*12	22.0	26.0	19.0
2*13	24.0	28.0	21.0
2*14	26.0	30.0	23.0
2*15	28.0	32.0	25.0
2*16	30.0	34.0	27.0
2*17	32.0	36.0	29.0
2*18	34.0	38.0	31.0
2*19	36.0	40.0	33.0
2*20	38.0	42.0	35.0
2*21	40.0	44.0	37.0
2*22	42.0	46.0	39.0



4P 结构样式



一般公差 (TOLERANCE)

X. $\pm .50$	.XX $\pm .10$
.X $\pm .20$	.XXX $\pm .05$
ANGLES	$\pm 1^\circ$

深圳市睿新晟业科技有限公司

品名 (TITLE)		制图 (DR)	
2.00 Pitch A型双排直插		校对 (CHKD)	
料号 (DWG.NO)		审核 (APPD)	
RXSY-PHB2. 0-2xNPZZ			
比例 (SCALE)	单位 (UNITS)		张数 (SHEET)
1 : 1	mm		1 OF 1
			SIZE
			A4
			REV
			A