


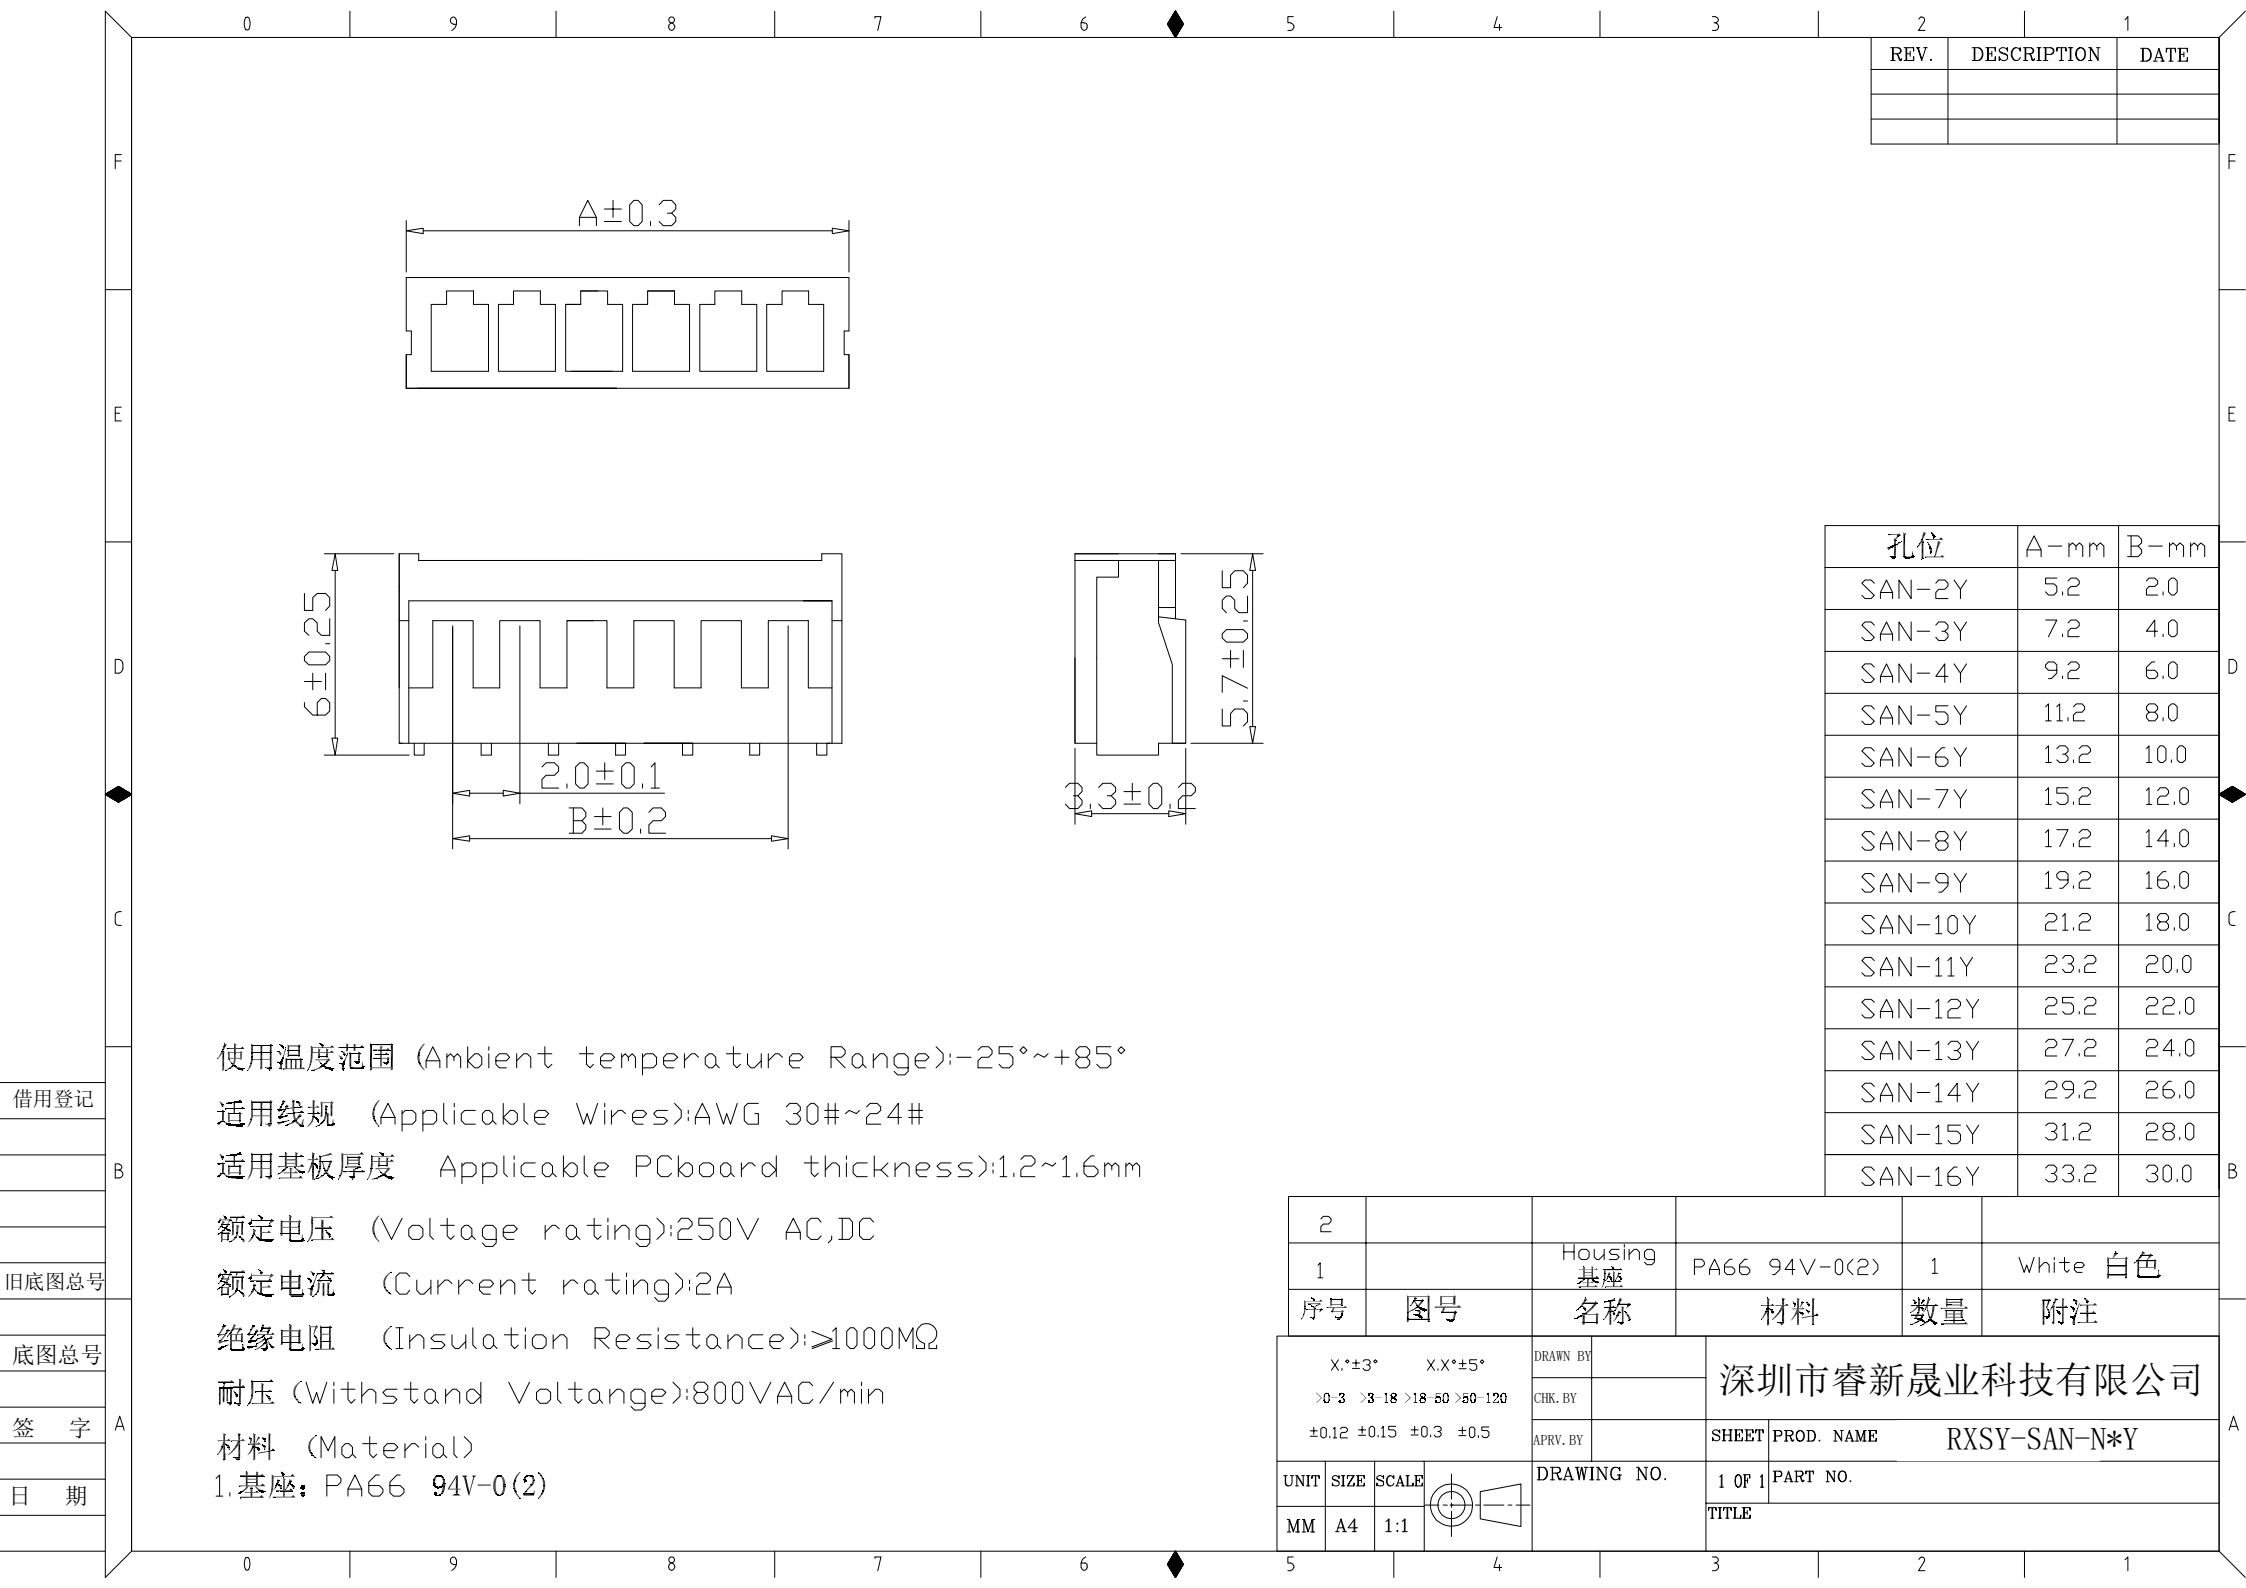

REV.	DESCRIPTION	DATE

孔位	A-mm	B-mm
SAN-2Y	5.2	2.0
SAN-3Y	7.2	4.0
SAN-4Y	9.2	6.0
SAN-5Y	11.2	8.0
SAN-6Y	13.2	10.0
SAN-7Y	15.2	12.0
SAN-8Y	17.2	14.0
SAN-9Y	19.2	16.0
SAN-10Y	21.2	18.0
SAN-11Y	23.2	20.0
SAN-12Y	25.2	22.0
SAN-13Y	27.2	24.0
SAN-14Y	29.2	26.0
SAN-15Y	31.2	28.0
SAN-16Y	33.2	30.0

使用温度范围 (Ambient temperature Range):-25°~+85°

适用线规 (Applicable Wires):AWG 30#~24#

适用基板厚度 Applicable PCboard thickness):1.2~1.6mm

额定电压 (Voltage rating):250V AC,DC

额定电流 (Current rating):2A

绝缘电阻 (Insulation Resistance):>1000MΩ

耐压 (Withstand Voltange):800VAC/min

材料 (Material)

1.基座: PA66 94V-0(2)

2					
1		Housing 基座	PA66 94V-0(2)	1	White 白色
序号	图号	名称	材料	数量	附注
X.*±3° X.X*±5°		DRAWN BY	深圳市睿新晟业科技有限公司		
>0-3 >3-18 >18-50 >50-120		CHK. BY			
±0.12 ±0.15 ±0.3 ±0.5		APRV. BY			
UNIT	SIZE	SCALE	DRAWING NO.	SHEET	PROD. NAME
MM	A4	1:1		1 OF 1	RXSY-SAN-N*Y
				PART NO.	
				TITLE	