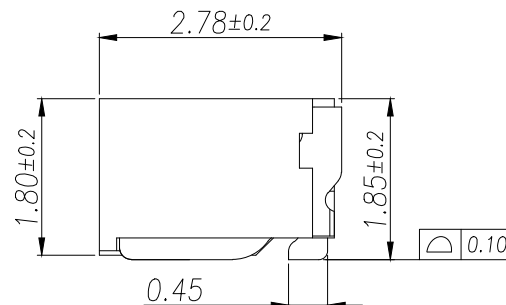
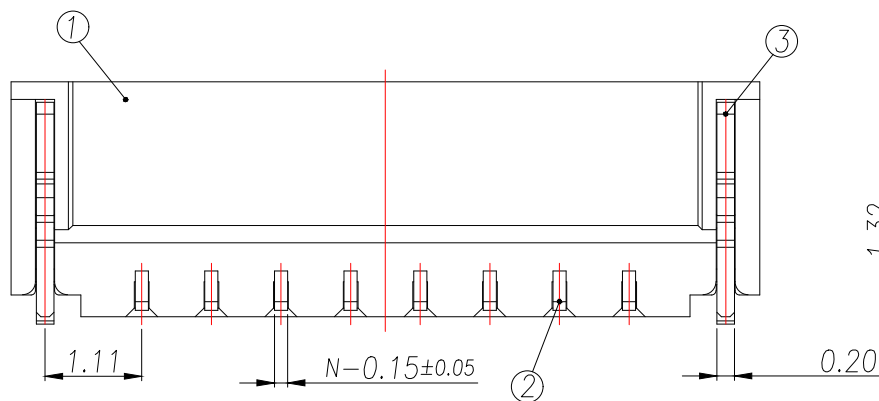
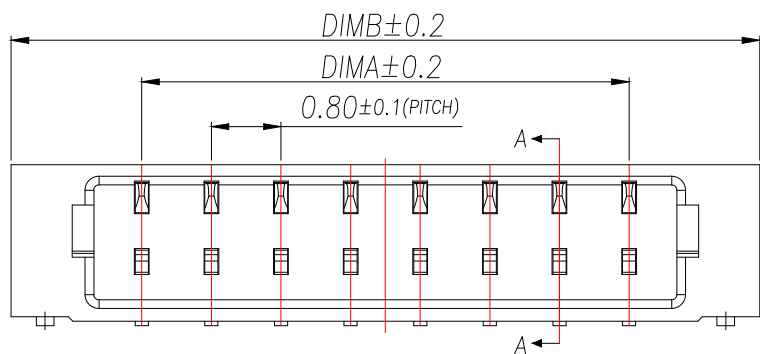



技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象.
2. 温度范围: $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$.
3. 额定电压: 30V, AC/DC.
4. 耐电压: 200V, AC/minute.
5. 接触电阻: $\leq 0.02\Omega$.
6. 绝缘电阻: $\geq 100\text{M}\Omega$.
7. 额定电流: 0.5A AC/DC.

序号	品名	材质
1	0.8-C型卧式WTB胶芯	LCP UL94 V-0 自然色
2	0.8-C型立式WTB端子	铜合金/表面镀锡
3	0.8-C型卧式WTB焊片	铜合金/表面镀锡

Part No	CKT	A	B
0.8-2PWT	2	0.80	3.80
0.8-3PWT	3	1.60	4.60
0.8-4PWT	4	2.40	5.40
0.8-5PWT	5	3.20	6.20
0.8-6PWT	6	4.00	7.00
0.8-7PWT	7	4.80	7.80
0.8-8PWT	8	5.60	8.60
0.8-9PWT	9	6.40	9.40
0.8-10PWT	10	7.20	10.20
0.8-11PWT	11	8.00	11.00
0.8-12PWT	12	8.80	11.80
0.8-13PWT	13	9.60	12.60
0.8-14PWT	14	10.40	13.40
0.8-15PWT	15	11.20	14.20

Part No	CKT	A	B
0.8-16PWT	16	12.00	15.00
0.8-17PWT	17	12.80	15.80
0.8-18PWT	18	13.60	16.60
0.8-19PWT	19	14.40	17.40
0.8-20PWT	20	15.20	18.20
0.8-21PWT	21	16.00	19.00
0.8-22PWT	22	16.80	19.80
0.8-23PWT	23	17.60	20.60
0.8-24PWT	24	18.40	21.40
0.8-25PWT	25	19.20	22.20
0.8-26PWT	26	20.00	23.00
0.8-27PWT	27	20.80	23.80
0.8-28PWT	28	21.60	24.60

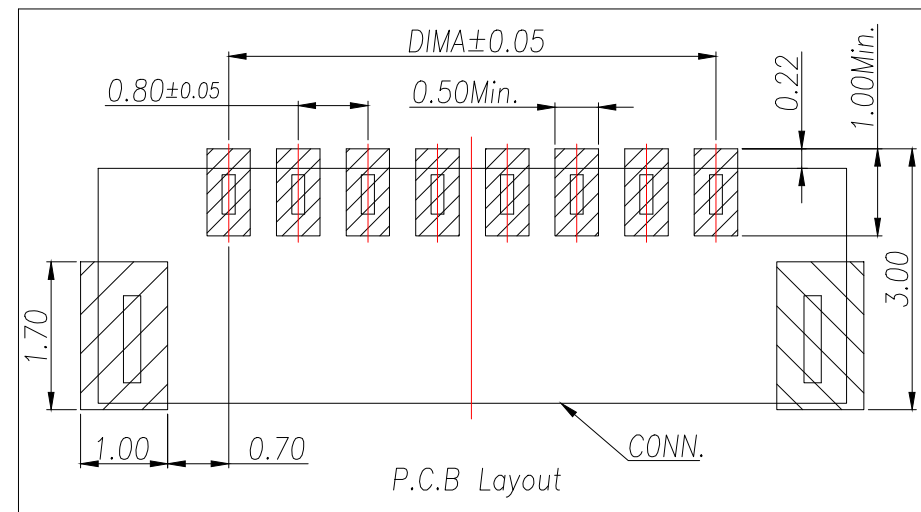

制图 DRAWN	变更内容 DESCRIPTION	日期 DATE	GENERAL TOLERANCE	制图 DRAWING	ROSE	料号 PART NO.	RXSY-SUR0.8-NPWT	版本 REV.	A
			X. ± 0.5 $\pm 1^{\circ}$	审核 CHECK	LEO	品名 TITLE	0.80 Pitch C型卧式WTB	页次 SHEET	1/1
			X.X ± 0.2	核准 APPROVAL	JOHN	客户料号 CUTM.NO.			
			X.XX ± 0.1	单位 UNITS	MM	比例 SCALE	1:1	深圳市睿新晟业科技有限公司	