
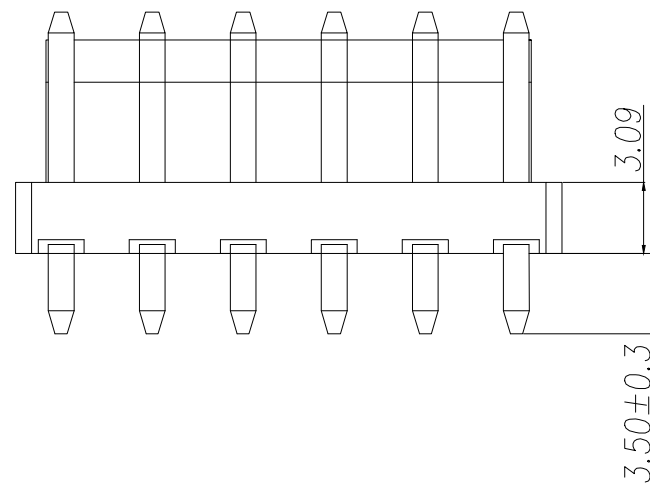
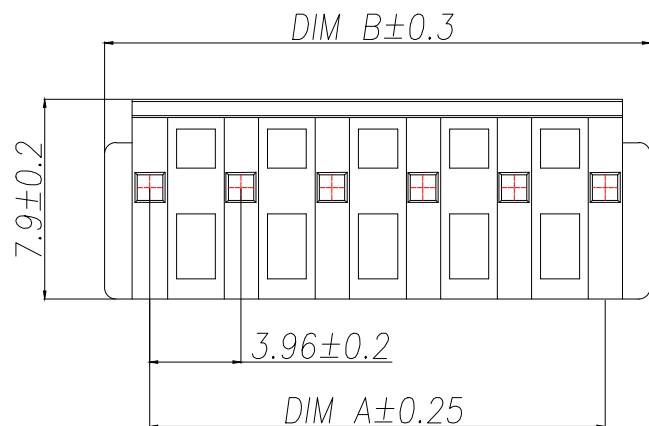
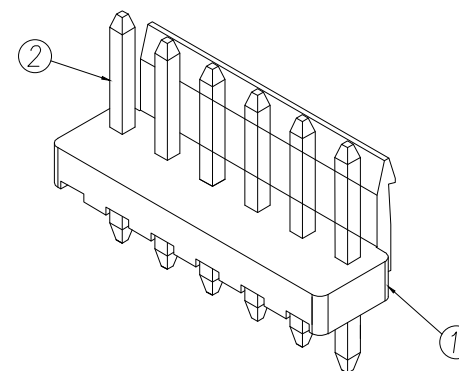


SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

技术要求:

1. 塑件材料: PA66 (UL-94V-0)
2. 接触件: 黄铜镀锡
3. 接触电阻: $\leq 20\text{m}\Omega$
4. 绝缘电阻: $\geq 1000\text{M}\Omega$
5. 额定电压: 250V AC DC
6. 额定电流: 3.0A AC DC
7. 耐压: 能承受 1000V AC/Minute
8. 工作温度: $-25^{\circ}\sim+85^{\circ}$
9. 可焊性试验: 浸锡面积 $\geq 95\%$ 温度 $235^{\circ}\pm 5^{\circ}$, 时间 2.5 ± 0.5 秒
10. 铅和镉等六大有害物质含量要符合环保要求。



Part No	Pin	A	B
VH3.96-2PZZ	2	3.96	7.92
VH3.96-3PZZ	3	7.92	11.88
VH3.96-4PZZ	4	11.88	15.84
VH3.96-5PZZ	5	15.84	19.80
VH3.96-6PZZ	6	19.80	23.76
VH3.96-7PZZ	7	23.76	27.72
VH3.96-8PZZ	8	27.72	31.68
VH3.96-9PZZ	9	31.68	35.64
VH3.96-10PZZ	10	35.64	39.60
...	...	...	...
VH3.96-20PZZ	20	75.24	79.20

制图 DRAWN	变更内容 DESCRIPTION	日期 DATE	GENERAL TOLERANCE		制图 DRAWING	ROSE			料号 PART NO.	RXSY-VH3.96-N*PZZ		版本 REV.	A
			.X±0.25	X'..±3"	审核 CHECK	LEO			品名 TITLE	压接式连接器		页次 SHEET	1/1
			.XX±0.12		核准 APPROVAL	JOHN			客户料号 CUTM.NO.				
			.XXX±0.05										
					单位 UNITS	MM	比例 SCALE	1:1	深圳市睿新晟业科技有限公司				