
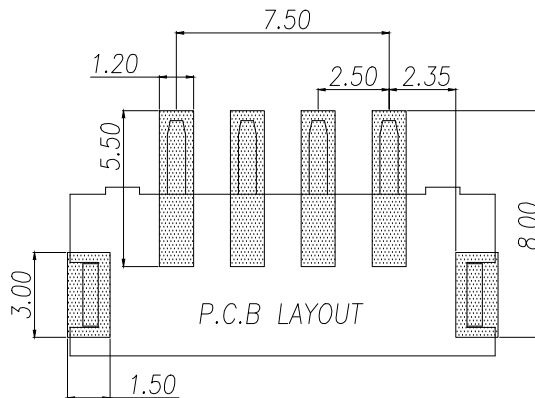
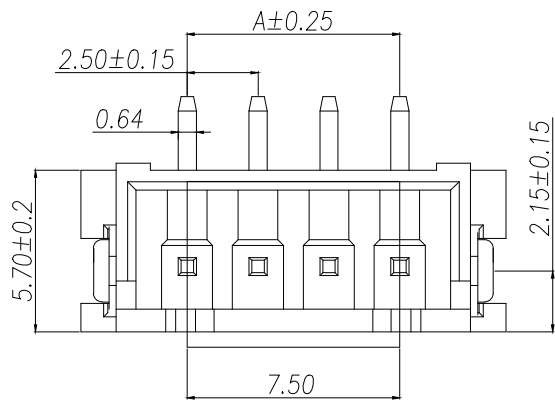
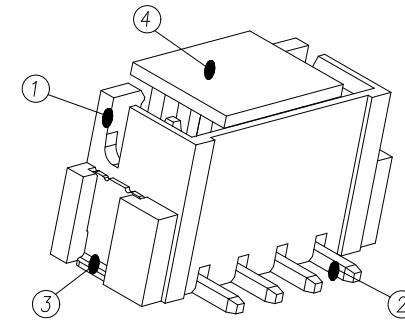

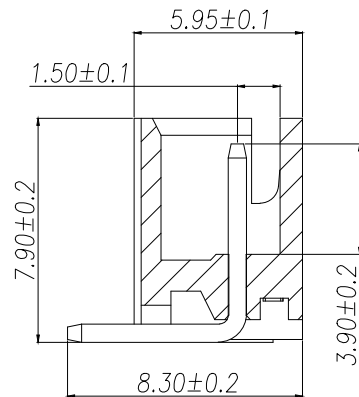



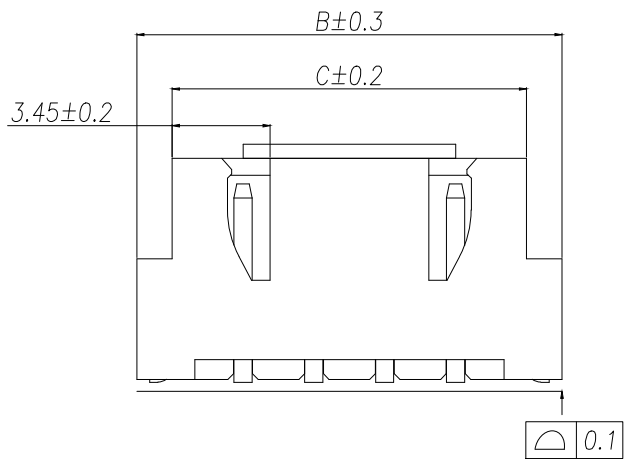

NOTES:

- 1.BASE: LCP
- 2.PIN: Brass
- 3.Solder Tab: Brass

SPECIFICATIONS:

- 1.Spacing: 2.5
- 2.Voltage Rating: 250V AC DC
- 3.Current Rating: 3A AC DC
- 4.Insulation Resistance: 800MΩ Min
- 5.Contact Resistance: 20mΩ Max
- 6.Withstanding voltage: 1000V AC 1/Minute
- 7.Temperatuer Range: -25℃ ~+ 85℃

Part No	Pin	A	B	C
XH2.5 -2PLT	2	2.50	10.00	7.50
XH2.5 -3PLT	3	5.00	12.50	10.00
XH2.5 -4PLT	4	7.50	15.00	12.50
XH2.5 -5PLT	5	10.00	17.50	15.00
XH2.5 -6PLT	6	12.50	20.00	17.50
XH2.5 -7PLT	7	15.00	22.50	20.00
XH2.5 -8PLT	8	17.50	25.00	22.50
XH2.5 -9PLT	9	20.00	27.50	25.00
XH2.5 -10PLT	10	22.50	30.00	27.50
XH2.5 -11PLT	11	25.00	32.50	30.00
XH2.5 -12PLT	12	27.50	35.00	32.50
XH2.5 -13PLT	13	30.00	37.50	35.00
XH2.5 -14PLT	14	32.50	40.00	37.50
XH2.5 -15PLT	15	35.00	42.50	40.00
XH2.5 -16PLT	16	37.50	45.00	42.50

制图 DRAWN	变更内容 DESCRIPTION	日期 DATE	GENERAL TOLERANCE		制图 DRAWING	ROSE			料号 PART NO.	RXXSY-XH2.5-NPLT	版本 REV.	A		
			.X±0.20	X".:±5°		审核 CHECK	LEO							
			.XX±0.10	X.X":±3°			核准 APPROVAL	JOHN						
			.XXX±0.05	X.XX":±1°										
					单位 UNITS	MM	比例 SCALE	1:1	深圳市睿新晟业科技有限公司					