
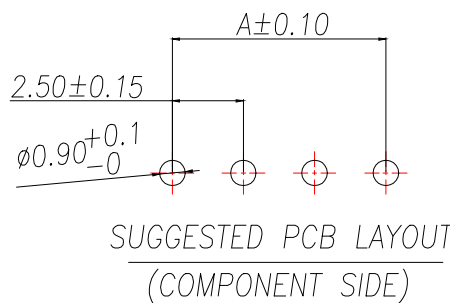
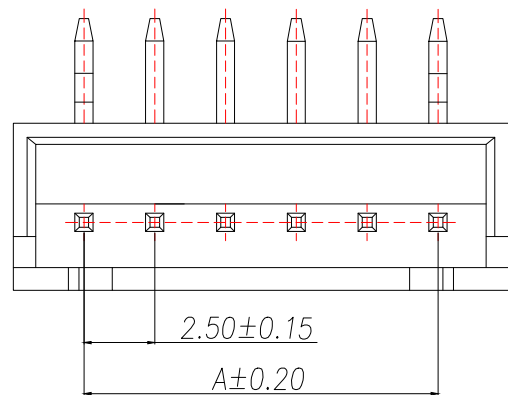
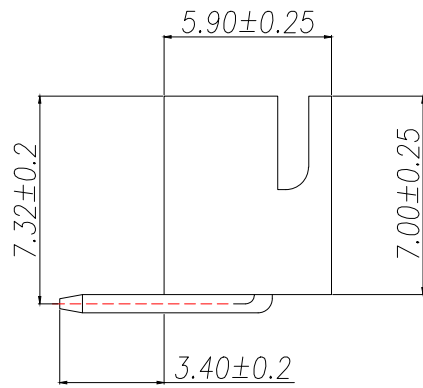


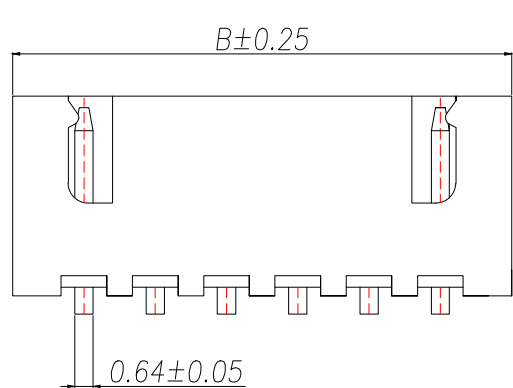

- 技术要求:
1. 塑件材料:PA66(UL-94V-0)
 2. 接触件:黄铜镀锡
 3. 接触电阻:≤10mΩ
 4. 绝缘电阻:≥100MΩ
 5. 额定电压:250V AC DC
 6. 额定电流:2.0A AC DC
 7. 耐压:能承受1000V AC/Minute
 8. 工作温度:-25°~+85°
 9. 可焊性试验:浸锡面积≥95%温度235±5, 时间2.5±0.5秒
 10. 铅和镉等六大有害物质含量要符合环保要求.

Part No	Pin	A	B
XH2.5 -2PWZ	2	2.50	7.50
XH2.5 -3PWZ	3	5.00	10.00
XH2.5 -4PWZ	4	7.50	12.50
XH2.5 -5PWZ	5	10.00	15.00
XH2.5 -6PWZ	6	12.50	17.50
XH2.5 -7PWZ	7	15.00	20.00
XH2.5 -8PWZ	8	17.50	22.50
XH2.5 -9PWZ	9	20.00	25.00
XH2.5 -10PWZ	10	22.50	27.50
XH2.5 -11PWZ	11	25.00	30.00
XH2.5 -12PWZ	12	27.50	32.50
XH2.5 -13PWZ	13	30.00	35.00
XH2.5 -14PWZ	14	32.50	37.50
XH2.5 -15PWZ	15	35.00	40.00
XH2.5 -16PWZ	16	37.50	42.50
XH2.5 -17PWZ	17	40.00	45.00
XH2.5 -18PWZ	18	42.50	47.50
XH2.5 -19PWZ	19	45.00	50.00
XH2.54-20PWZ	20	47.50	52.50

2	端子Contact	黄铜	N*1	电镀(锡):整个表面镀底镍 30u"MIN,再镀锡80u"MIN
1	基座Wafer	PA66(UL94V-0)	1	白色
序号	名称	材料	数量	备注
制图 DRAWN	变更内容 DESCRIPTION		日期 DATE	GENERAL TOLERANCE
				.X±0.20 ±2°
				.XX±0.10
				.XXX±0.05

NG	ROSE			料号 PART NO.	RXSY-XH2.5-NPWZ	版本 REV.	A			
K	LEO			品名 TITLE	WAFER XH2.54MM	页次 SHEET	1/1			
VAL	JOHN			客户料号 CUTM.NO.						
	MM	比例 SCALE	1:1	深圳市睿新晟业科技有限公司						