
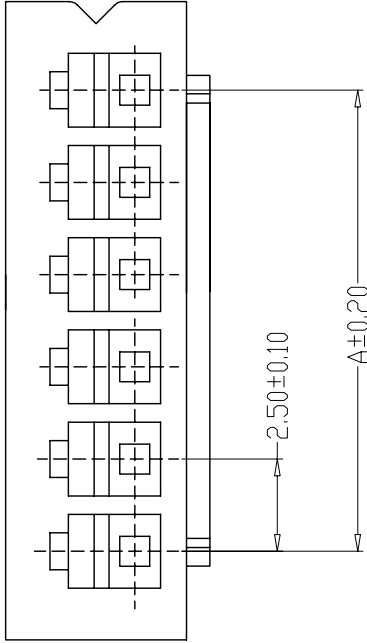
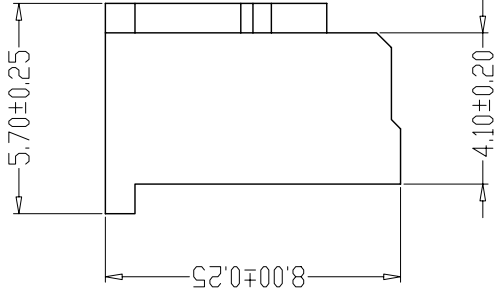


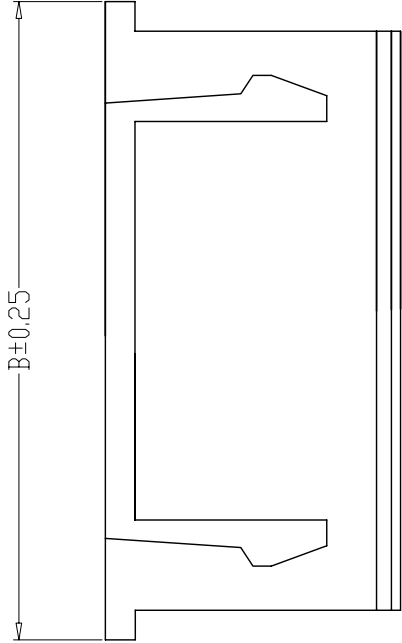

SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000 MΩ Min
- 6、Withstanding Voltang: 1000V AC/minute
- 7、Material:Nylon66, UL94V-0

编 号	尺寸 (mm)	
	A	B
XH2.5 -02Y	2.50	7.50
XH2.5 -03Y	5.00	10.00
XH2.5 -04Y	7.50	12.50
XH2.5 -05Y	10.00	15.00
XH2.5 -06Y	12.50	17.50
XH2.5 -07Y	15.00	20.00
XH2.5 -08Y	17.50	22.50
XH2.5 -09Y	20.00	25.00
XH2.5 -10Y	22.50	27.50
XH2.5 -11Y	25.00	30.00
XH2.5 -12Y	27.50	32.50
XH2.5 -20Y	47.50	52.50

制图 DRAWN	变更内容 DESCRIPTION	日期 DATE	GENERAL TOLERANCE		制 图 DRAWING	料 号 PART NO.	RXXSY-XH2.5-N*Y		版本 REV.	A
			X.±0.25	X'±2°			压线端子胶壳			
			X.±0.20	X'±1°	审 核 CHECK	品 名 TITLE	客户料号 CUTL. NO.			
					核 准 APPROVAL	深圳市睿新晟业科技有限公司				
			.XX±0.15	.XX'±0.5°						
			.XXX±0.10	.XXX'±0.5°	单 位 UNITS					
					比 例 SCALE					
						MM				