


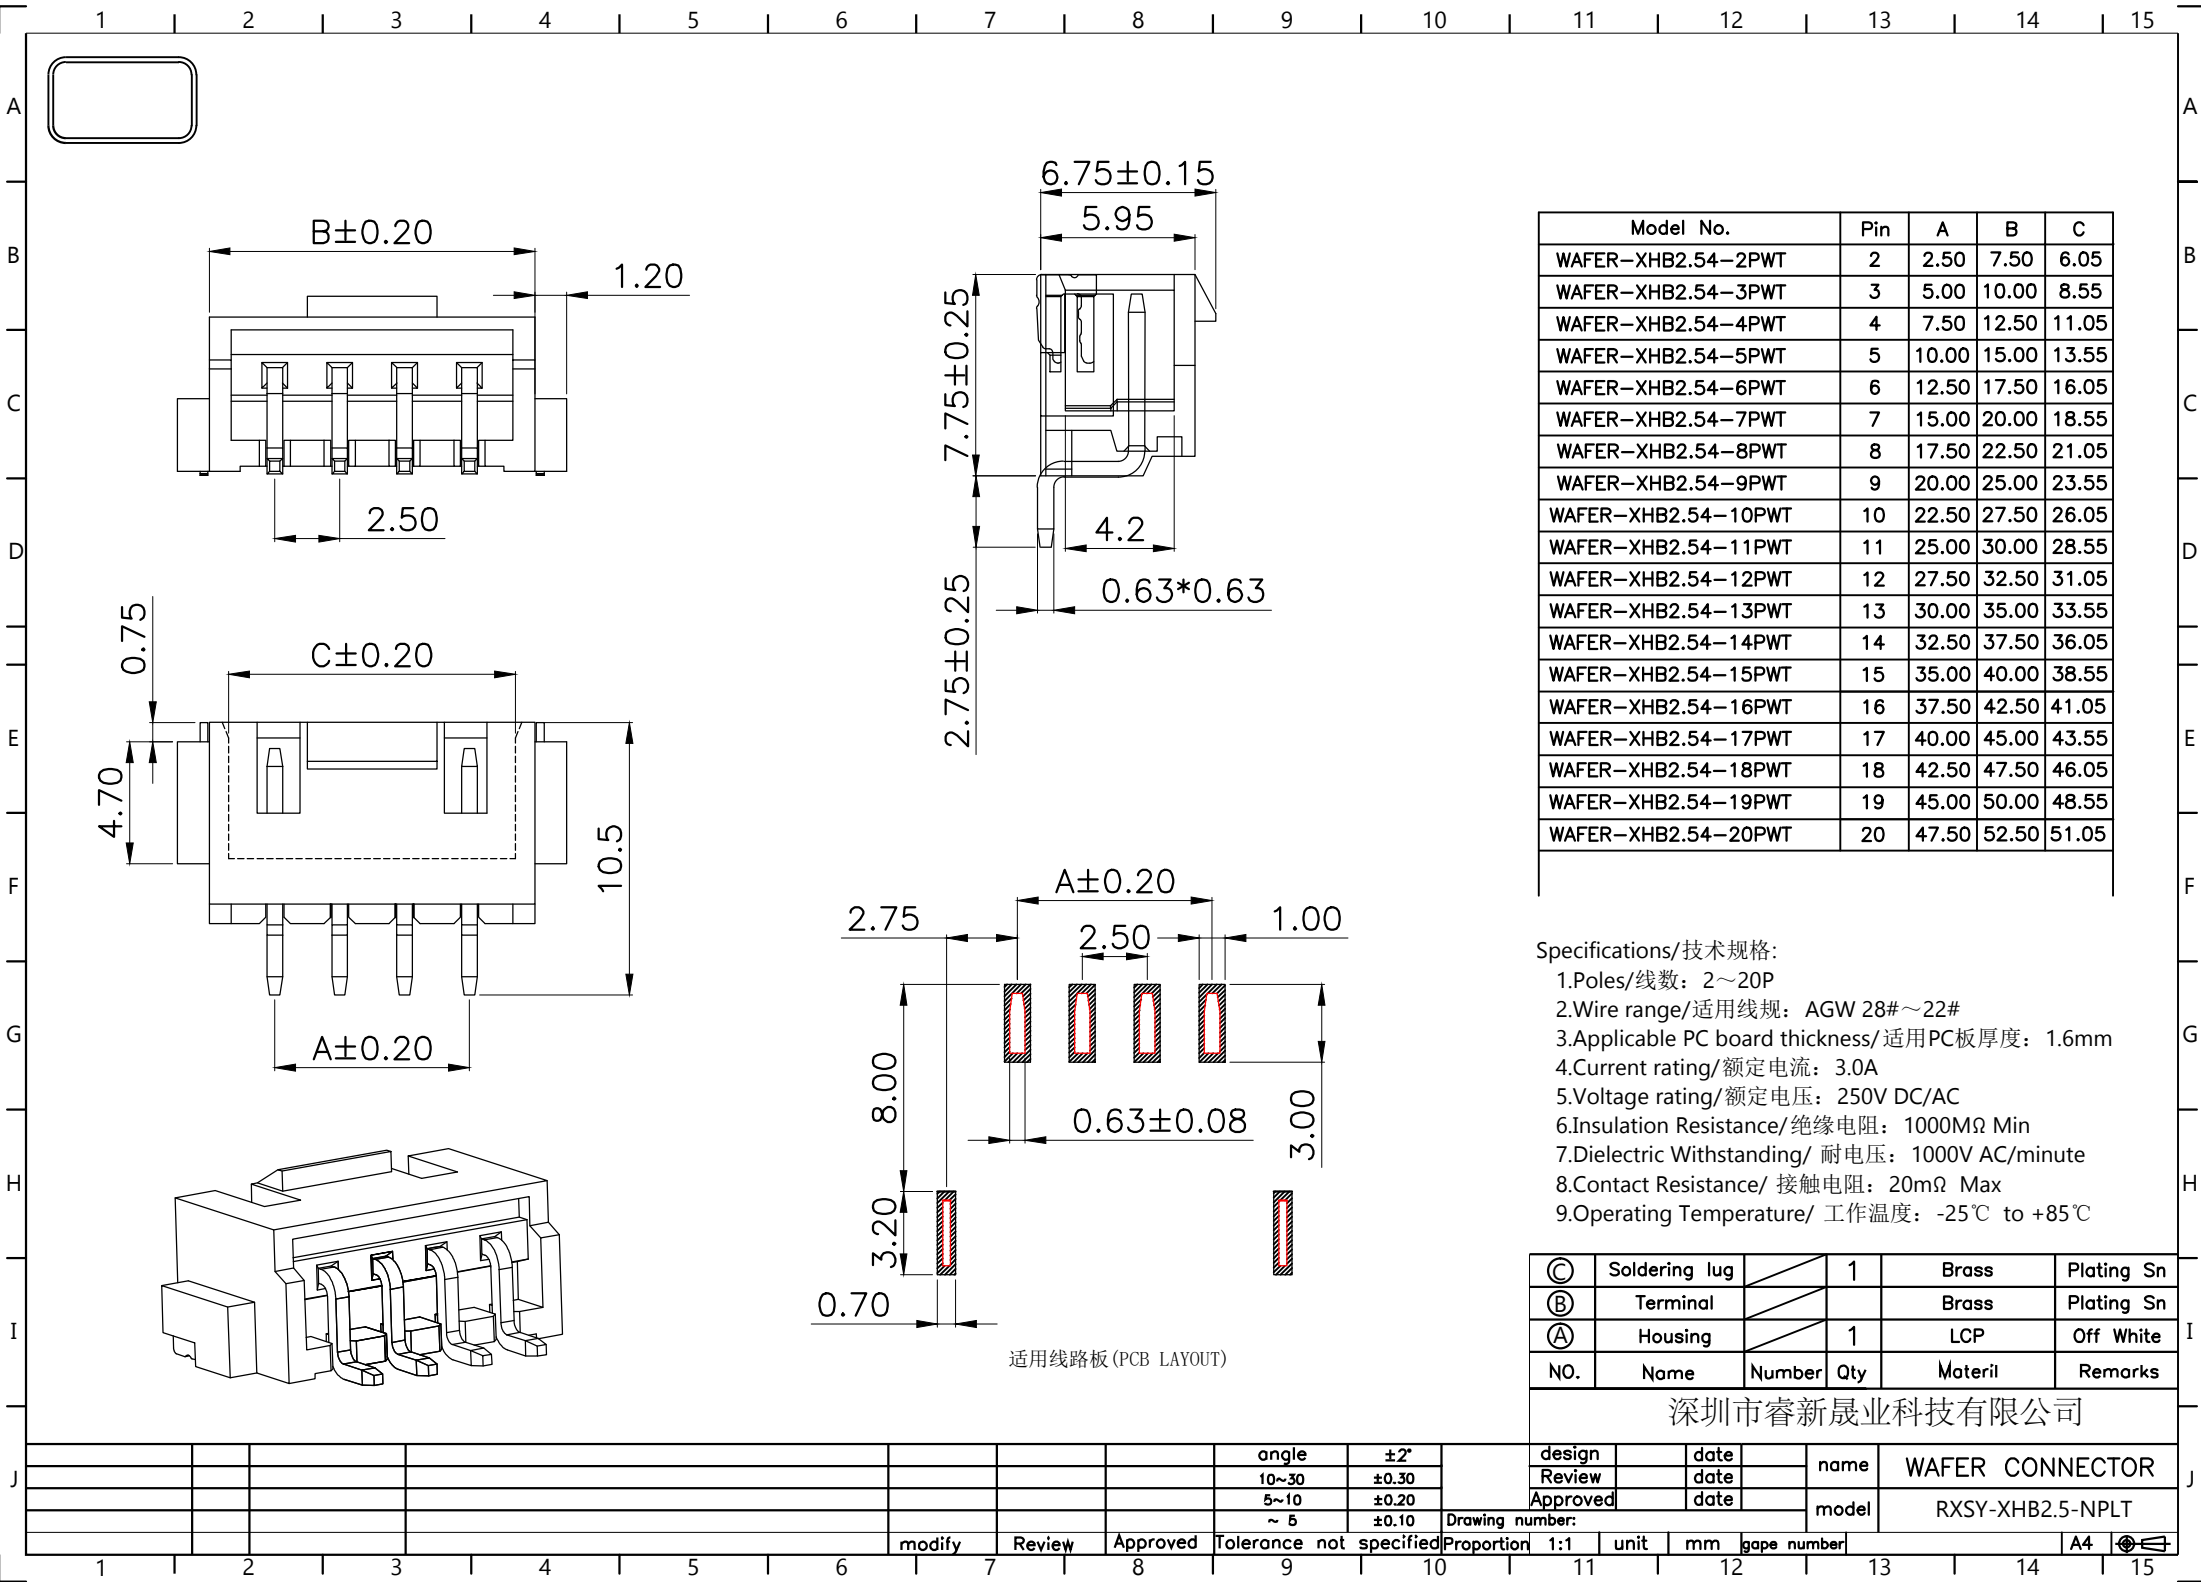

Model No.	Pin	A	B	C
WAFER-XHB2.54-2PWT	2	2.50	7.50	6.05
WAFER-XHB2.54-3PWT	3	5.00	10.00	8.55
WAFER-XHB2.54-4PWT	4	7.50	12.50	11.05
WAFER-XHB2.54-5PWT	5	10.00	15.00	13.55
WAFER-XHB2.54-6PWT	6	12.50	17.50	16.05
WAFER-XHB2.54-7PWT	7	15.00	20.00	18.55
WAFER-XHB2.54-8PWT	8	17.50	22.50	21.05
WAFER-XHB2.54-9PWT	9	20.00	25.00	23.55
WAFER-XHB2.54-10PWT	10	22.50	27.50	26.05
WAFER-XHB2.54-11PWT	11	25.00	30.00	28.55
WAFER-XHB2.54-12PWT	12	27.50	32.50	31.05
WAFER-XHB2.54-13PWT	13	30.00	35.00	33.55
WAFER-XHB2.54-14PWT	14	32.50	37.50	36.05
WAFER-XHB2.54-15PWT	15	35.00	40.00	38.55
WAFER-XHB2.54-16PWT	16	37.50	42.50	41.05
WAFER-XHB2.54-17PWT	17	40.00	45.00	43.55
WAFER-XHB2.54-18PWT	18	42.50	47.50	46.05
WAFER-XHB2.54-19PWT	19	45.00	50.00	48.55
WAFER-XHB2.54-20PWT	20	47.50	52.50	51.05

Specifications/技术规格:

- 1.Poles/线数: 2~20P
- 2.Wire range/适用线规: AGW 28#~22#
- 3.Applicable PC board thickness/适用PC板厚度: 1.6mm
- 4.Current rating/额定电流: 3.0A
- 5.Voltage rating/额定电压: 250V DC/AC
- 6.Insulation Resistance/绝缘电阻: 1000MΩ Min
- 7.Dielectric Withstanding/ 耐电压: 1000V AC/minute
- 8.Contact Resistance/ 接触电阻: 20mΩ Max
- 9.Operating Temperature/ 工作温度: -25℃ to +85℃

Ⓒ	Soldering lug		1	Brass	Plating Sn
Ⓑ	Terminal			Brass	Plating Sn
Ⓐ	Housing		1	LCP	Off White
NO.	Name	Number	Qty	Materil	Remarks

深圳市睿新晟业科技有限公司

								angle	±2°		design		date		name	WAFER CONNECTOR
								10~30	±0.30		Review		date			
								5~10	±0.20		Approved		date		model	RXSY-XHB2.5-NPLT
								~ 5	±0.10	Drawing number:						
								modify	Review	Approved	Tolerance not specified	Proportion	1:1	unit	mm	gape number
															A4	