
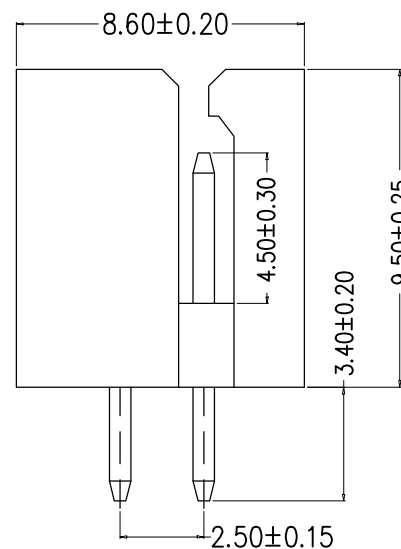
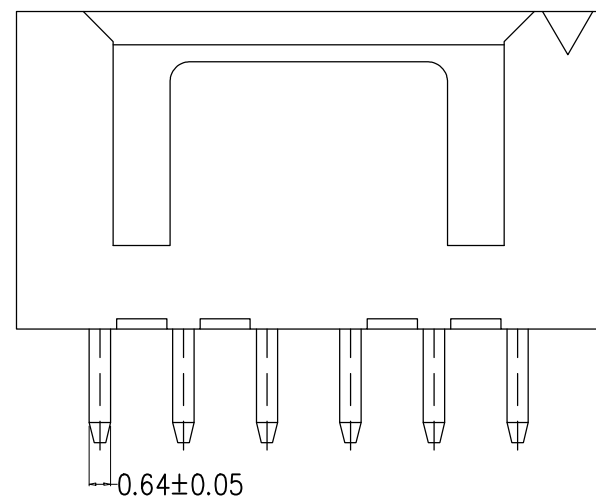
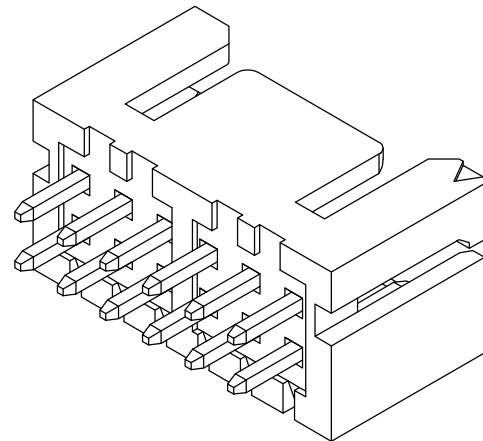


7		8		9	
标 记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修 改 REVISE	日 期 DATE	核 准 APPROVE	


编号	尺寸 (mm)		A
	A	B	
2*02A	2.50	7.50	A
2*03A	5.00	10.00	
2*04A	7.50	12.50	
2*05A	10.00	15.00	
2*06A	12.50	17.50	B
2*07A	15.00	20.00	
2*08A	17.50	22.50	
2*09A	20.00	25.00	
2*10A	22.50	27.50	
2*11A	25.00	30.00	
2*12A	27.50	32.50	


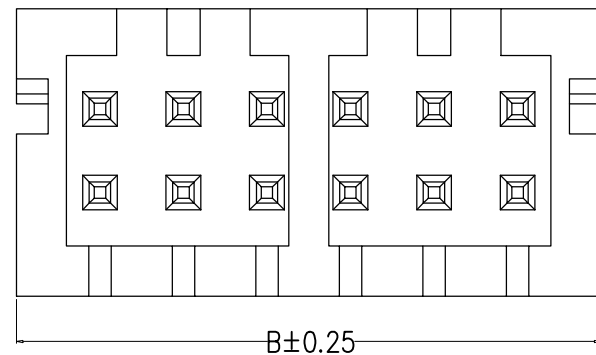


SPECIFICATIONS

- 1.Current Rating: 3A AC, DC
- 2.Voltage Rating: 250V AC, DC
- 3.Temperatuer Range: $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$
- 4.Contact Resistance: $30\text{m}\Omega$ Max
- 5.Insulation Resistance: $1000\text{M}\Omega$ Min
- 6.Withstanding Voltang: $800\text{V AC}/\text{minute}$
- 7.Material: Wafer PA66.Beige
PIN Brass Tin-plated

2	插针	铜	镀锡		F
1	基座	PA66	米色		
序 号	品 名	材 质	电镀/颜色	备 注	

深圳市睿新晟业科技有限公司				品 名 TITLE	针 座	
				料 号 PART NO	RXXSY-XHD2. 5-2xN*PZZ	
GENERAL TOLERANCES (UNLESS SPECIFIED)		比 列 SCALE	1 : 1			
X.X±0.25	X.±2°	单 位 UNIT	MM	制 图 DRAW		
X.XX±0.20		张 数 PART NO	1 OF 1	审 核 CHECKED		
X.XXX±0.10		版 本 REV	A	批 准 APPROVE		

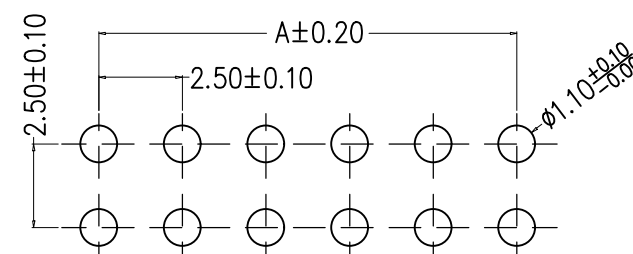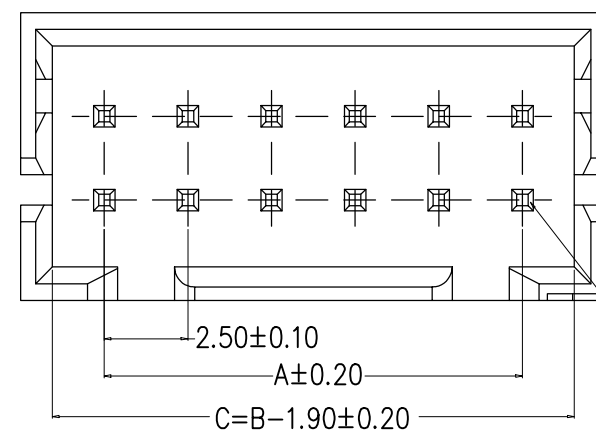

PCB LAYOUT