
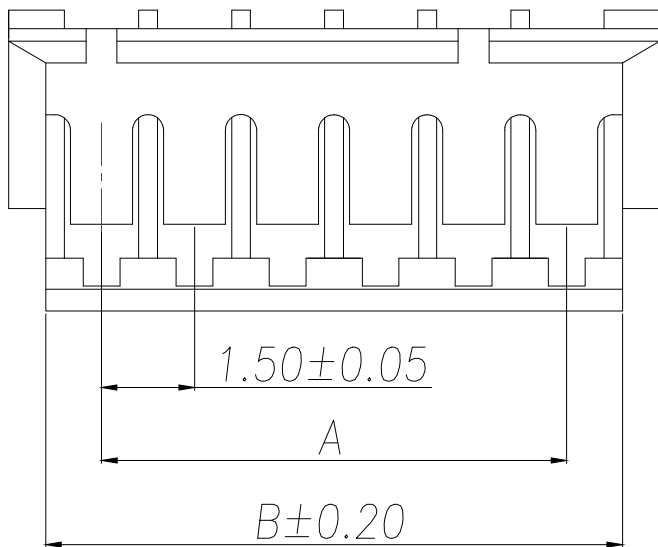
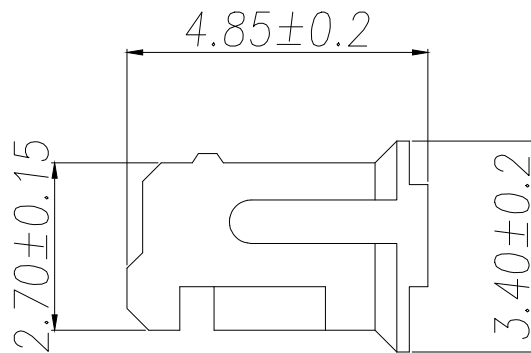


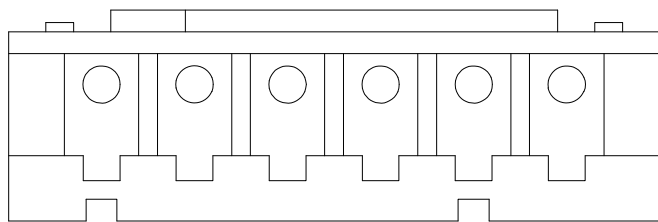

技术要求Specification:

- 1、材质Material: PA66 UL94V-2;
- 2、塑件表面平整光洁, 无明显的毛刺、气泡、变形、浇口拉伤、缺料等不良现象。

Plastic surface smooth and clean, no obvious burrsbubbles, distortion, gate strain, lack of material andother undesirable phenomena.

Part No	Pin	A	B
ZH1.5-2P	2	1.50	3.30
ZH1.5-3P	3	3.00	4.80
ZH1.5-4P	4	4.50	6.30
ZH1.5-5P	5	6.00	7.80
ZH1.5-6P	6	7.50	9.30
ZH1.5-7P	7	9.00	10.80
ZH1.5-8P	8	10.50	12.30
ZH1.5-9P	9	12.00	13.80
ZH1.5-10P	10	13.50	15.30
ZH1.5-11P	11	15.00	16.80
ZH1.5-12P	12	16.50	18.30
ZH1.5-13P	13	18.00	19.80
ZH1.5-14P	14	19.50	21.30
ZH1.5-15P	15	21.00	22.80
ZH1.5-16P	16	22.50	24.30
ZH1.5-17P	17	24.00	25.80
ZH1.5-18P	18	25.50	27.30
ZH1.5-19P	19	27.00	28.80
ZH1.5-20P	20	28.50	30.30

制图 DRAWN	变更内容 DESCRIPTION	日期 DATE	GENERAL TOLERANCE		制图 DRAWING	ROSE			料号 PART NO.	RXSY-ZH1.5-N*Y		版本 REV.	A
			.X±0.30	X.*±1°	审核 CHECK	LEO			品名 TITLE	ZH1.5MM HOUSING		页次 SHEET	1/1
			.XX±0.20		核准 APPROVAL	JOHN			客户料号 CUTM.NO.				
			.XXX±0.10						深圳市睿新晟业科技有限公司				
					单位 UNITS	MM	比例 SCALE	1:1					