

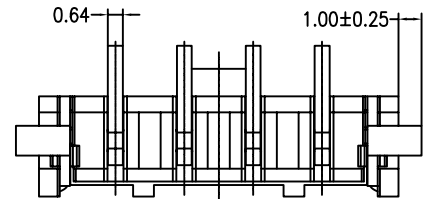

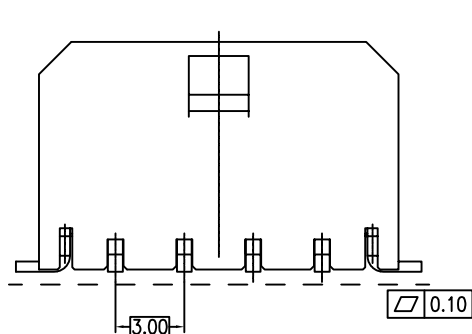
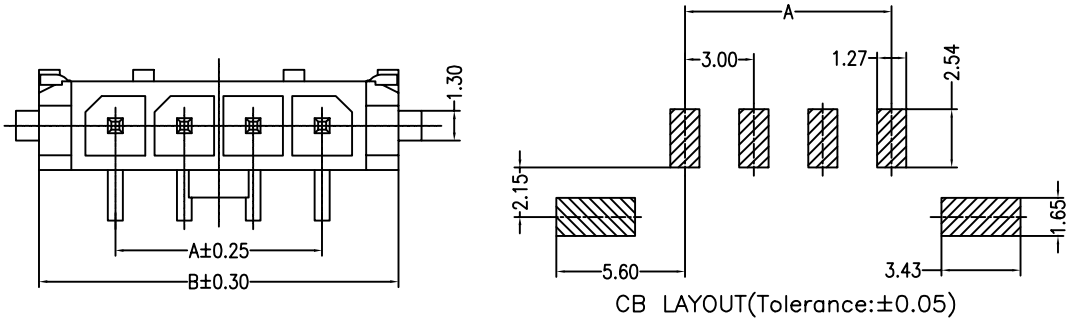
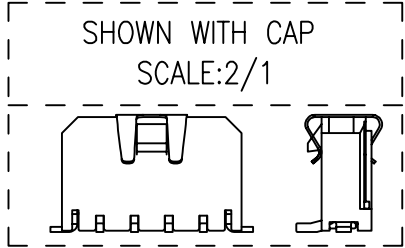


REV	DESCRIPTION	DESIGN	DATE
A0	NEW RELEASE	陈亭伦	2025/07/08



Specifications:
Contact resistance:≤10mΩ
Insulation resistance:≥1000MΩ
Rated voltage:250V AC DC
Rated current:5.0A AC DC
Withstand Voltage: 1000V AC/minute
Temperature Range:-40℃~+125℃
Housing:LCP UL94V-0,BLACK
Contacts:Brass/MATTE Sn-plated
Solder Tabs:Brass/MATTE Sn-plated
CAP:Stainless steel

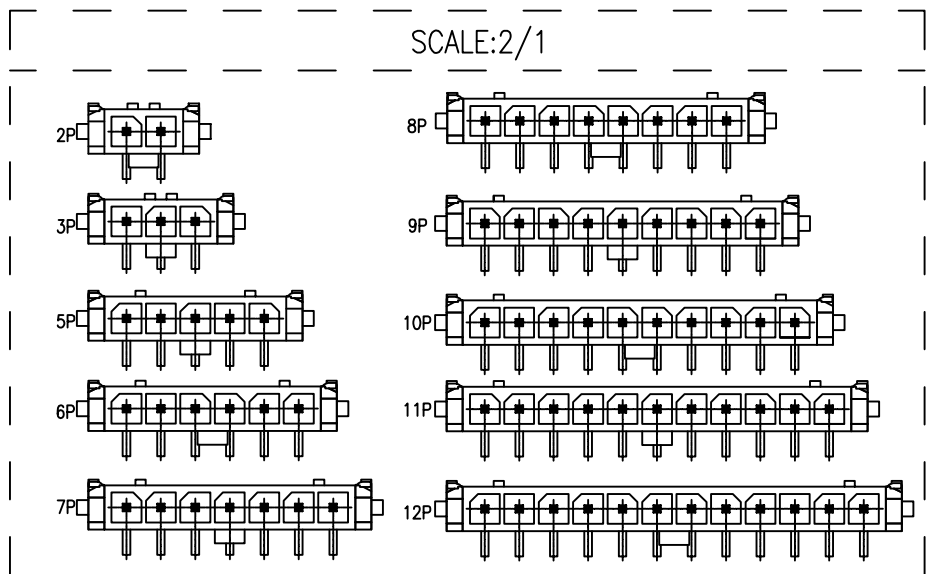

PIN	DIM	ADIM	B
2	3.00	9.65	
3	6.00	12.65	
4	9.00	15.65	
5	12.00	18.65	
6	15.00	21.65	
7	18.00	24.65	
8	21.00	27.65	
*9	24.00	30.65	
*10	27.00	33.65	
*11	30.00	36.65	
*12	33.00	39.65	

深圳市睿新晟业科技有限公司			TITLE: MX3.0单排立贴	
GENERAL		TOLERANCE	USE: CUSTOMER	
X.	±0.50		PART NO.: RXSY-MX3.0-N*PLT	
X.X	±0.30	X.X ±2°	APPD:	DWG NO.:
X.XX	±0.20	X.XX ±1°	CHKD:	
UNITS: mm		DR:	SCALE 1 : 1	SHEET 1 / 1